
TURBO VAC 60RE

Serial Number: 23A01+ Part # 301025



OPERATOR'S & PARTS MANUAL

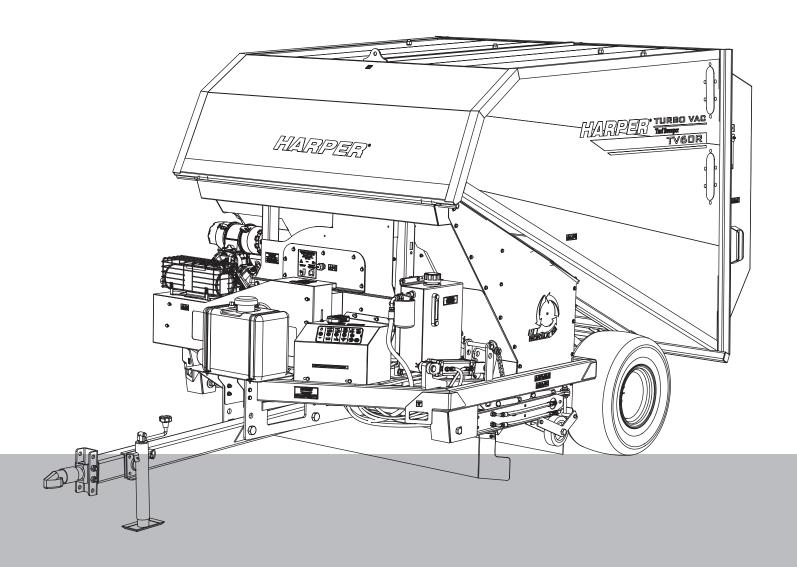

Thank you for purchasing a Harper Turbo Vac.

TO THE OWNER OR OPERATOR:

As with all Harper products, the Harper Turbo Vac has been developed through tough design and testing procedures to produce a machine that can be relied on. This manual gives assembly, operating, and service information for models **TV60RE**. Please read and understand all instructional material included with the Turbo Vac and its components before assembling and operating the equipment.

A Turbo Vac can present hazards to an operator who follows unsafe procedures in either the operation or maintenance of the unit. Therefore, **SAFETY WARNINGS** are presented at certain locations in the text.

SYMBOL:



SAFETY WARNING!



MEANING: Failure to understand and obey this warning may result in injury to you or others. Whenever this symbol is used, please pay very close attention to the information presented, and make sure you fully understand. If you do not, contact your dealer or Harper Industries for clarification.



SAFETY WARNING!



All shields and guards must be in place for proper and safe operation of this equipment. Where they are shown removed in this manual, it is for purposes of illustration and instruction only. Do not operate this equipment unless all shields and guards are in place.

Harper Industries, Inc. is continually striving to improve the design and performance of its products. We reserve the right to make changes in specifications and design without thereby incurring any obligation relative to previously manufactured products.

© 2025 Harper Industries, Inc.

The Harper and Goossen names are registered trademarks of Harper Industries, Inc. All other brand and product names are trademarks or registered trademarks of their respective companies.



LIMITED WARRANTY

Harper Industries, Inc. (HII) warrants to each purchaser of a new Harper Turbo Vac from an authorized dealer or representative, that such equipment is free of manufacturer's defects in workmanship and materials which appear while in normal service for a period of ONE YEAR commencing with delivery to the original user.

The obligation of HII under this warranty is expressly limited, at our option, to replacement or repair at a service facility designated by Harper Industries or at the manufacturing plant in Harper, KS. A part will be replaced after inspection discloses it to have been defective. This warranty does not apply to defects caused by damage or unreasonable use (including failure to provide reasonable and necessary maintenance, or by performing functions without genuine Harper Turbo Vac accessories) while in the possession of the consumer.

Warranty is limited to parts, labor and ground freight delivery of replacement parts. HII shall not be liable for the consequential damages of any kind, including but not limited to consequential labor costs or transportation charges in connection with replacement or repair of defective parts.

This warranty does not apply to parts subjected to misuse, abuse, alteration, improper or inadequate maintenance, or normal wear (including belts, battery, chains, filters, knives, brush and broom).

Engines are not covered under this warranty. Refer to manufacturer's warranty for specific warranty information. Harper Industries, its agents or representatives, make or imply no other warranties.

Harper Industries makes no warranty with respect to trade accessories. They are subject to the warranties of their respective manufacturers.

ANY IMPLIED OR STATUTORY WARRANTIES, INCLUDING ANY WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. HII makes no other express warranty, nor is anyone authorized to make any on behalf of HII.

For further information please contact your nearest Harper Turbo Vac dealer.

EVAPORATIVE EMISSIONS CONTROL SYSTEM WARRANTY

YOUR WARRANTY RIGHTS AND OBLIGATIONS

The California Air Resources Board and Harper Industries are pleased to explain the evaporative emission control system's warranty on your 2024+ Harper Turbo VAC. In California, new equipment that use small off-road engines must be designed, built, and equipped to meet the State's stringent anti-smog standards. Harper Industries must warrant the evaporative emission control system on your small Turbo VAC for the period listed below provided there has been no abuse, neglect or improper maintenance of your equipment leading to the failure of the evaporative emission control system.

Your evaporative emission control system may include parts such as: carburetors, fuel tanks, fuel lines (for liquid fuel and fuel vapors), fuel caps, valves, canisters, filters, clamps, connectors, and other associated components.

MANUFACTURER'S WARRANTY COVERAGE:

This evaporative emission control system is warranted for two years. If any evaporative emission-related part on your equipment is defective, the part will be repaired or replaced by Harper Industries.

OWNER'S WARRANTY RESPONSIBILITIES:

- 1. As the Turbo VAC owner, you are responsible for performance of the required maintenance listed in your owner's manual. Harper Industries recommends that you retain all receipts covering maintenance on your Turbo VAC, but Harper Industries cannot deny warranty coverage solely for the lack of receipts.
- 2. As the Turbo VAC owner, you should be aware that Harper Industries may deny you warranty coverage if your Turbo VAC or a part has failed due to abuse, neglect, or improper maintenance or unapproved modifications.
- 3. You are responsible for presenting your Turbo VAC to a Harper Industries dealer as soon as the problem exists. The warranty repairs shall be completed in a reasonable amount of time, not to exceed 30 days. If you have a question regarding your warranty coverage, you should contact your authorized Harper Turbo VAC dealer or Harper Industries at (620) 896-7381.



GENERAL EVAPORATIVE EMISSIONS WARRANY COVERGE

- 1. Any warranted part that is not scheduled for replacement as part of the regular maintenance program, shown in the operator's manual, provided with the mower, is warranted for the warranty period stated above. If the part fails during the period of warranty coverage, the part will be repaired or replaced by Harper Industries. Any such part repaired or replaced under the warranty will be warranted for the remainder of the period.
- 2. Any warranted part that is scheduled only for regular inspection in the written instructions supplied is warranted for the warranty period stated above. Instructions that state "repair or replace as necessary" will not reduce the period of warranty coverage. Any such part repaired or replaced under the warranty will be warranted for the remainder of the period.
- 3. Any warranted part that is scheduled for replacement as part of the regular maintenance program, shown in the operator's manual, provided with the mower, is warranted for the period of time prior to the first scheduled replacement date for that part. If the part fails before the first scheduled replacement, the part must be repaired or replaced by Harper Industries. Any such part repaired or replaced under warranty will be warranted for the remainder of the period prior to the first scheduled replacement date for the part.
- 4. Repair or replacement of any warranted part under the warranty provisions herein must be performed at an Authorized Harper Industries Dealer at no charge to the owner.
- 5. Notwithstanding the provisions of subsection (4) above, warranty service or repairs will be provided at an Authorized Harper Industries Dealer.
- 6. The Turbo Vac's owner will not be charged for diagnostic labor that is directly associated with diagnosis of defective, emission-related warranted part, provided that such diagnostic work is performed at an Authorized Harper Industries Dealer.
- 7. Harper Industries is liable for damages to other engine or equipment components proximately caused by a failure under warranty of warranted part.
- 8. Throughout the evaporative emission control system's warranty period stated above, Harper Turf Equipment will maintain a supply of warranted parts sufficient to meet the expected demand for such parts.
- 9. Only Harper Industries approved replacement parts may be used in the performance of any warranty maintenance or repairs and must be provided without charge to the owner. Such use will not reduce the warranty obligations of Harper Industries.
- 10. Add-on or modified parts that are not exempt by the Air Resources Board may not be used. The use of a non-exempted add-on or modified part by the purchaser will be grounds for disallowing a warranty claim. Harper Industries will not be liable to warrant failures of warranted parts caused by the use of a non-exempted add-on or modified part.

EMISSION WARRANTY PARTS LIST

The following emission warranty parts are covered: fuel tanks, fuel lines, fuel line fittings, fuel caps, carbon canisters, canister mounting brackets, carburetor purge port connections, filters*, vapor hoses, clamps, control valves*, control solenoids*, electronic controls*, vacuum control diaphragms*, purge valves, liquid/vapor separators.

* As they relate to the installed equipment evaporative control system.

D				D		C
$\mathbf{\Gamma}$	ᆮ	U	U	$\mathbf{\Gamma}$	U	J

Date of Purchase / /	Serial Number Machine
Dealer's Name	Serial Number Engine
Dealer's Phone	



Supplier's declaration of conformity



This is the Australian Communications and Media Authority (ACMA) approved form for a declaration of conformity under the following legislative instruments:

- > Radiocommunications Equipment (General) Rules 2021
- > Radiocommunications Labelling (Electromagnetic Compatibility) Notice 2017.

This is a sample form for a declaration of conformity under the Telecommunications (Labelling Notice for Customer Equipment and Customer Cabling) Instrument 2015.

Instructions for completion

Do not return this form to the ACMA. This completed form must be retained by the supplier as part of the documentation required for the compliance records. However, it must be made available for inspection by the ACMA when requested.

Supplier's details (manufacturer, importer or authoris	sed agent)
Company name (or individual)	
TORO Australia Pty. Ltd	ACN/ARBN N1625
Trading as	or New Zealand IRDN
Street address (Australia or New Zealand)	47 001 310 443
53 Howards Rd	
Beverly, S.A POSTCODE 5009	
Phone:	

Product details and date of manufacture

Product description - brand name, type, current model, lot, batch or serial number (if available), software/firmware version (if applicable)

Model No.	Product Description
914015	TV60 RE Base Machine - 26.5 HP Kohler Engine



ACMA form - C02

Compliance – applicable standards and other supporting documents

Evidence of compliance with applicable standards may be demonstrated by test reports, endorsed/accredited test reports, certification/competent body statements.

Having had regard to these documents, I am satisfied the above-mentioned product complies with the requirements of the relevant ACMA standards made under the *Radiocommunications Act* 1992 and/or the *Telecommunications Act* 1997.

List these documents including details of the standard title, number and, if applicable, number of the test report/endorsed test report or certification/competent body statement.

AS/NZS CISPR 12:2007	


Declaration

I hereby declare that:

- 1. I am authorised to make this declaration on behalf of the Company mentioned above
- 2. the contents of this form are true and correct
- the product mentioned above complies with the applicable above mentioned standards and all products supplied under this declaration will be identical to the product identified above
- 4. I understand that giving false or misleading information is a serious offence.

Note: It is an offence to knowingly provide false or misleading information to a Commonwealth entity or a person who is exercising powers, performing functions under, or in connection with, a law of the Commonwealth. It is an offence to knowingly provide false or misleading information or documents in compliance or purported compliance with a law of the Commonwealth. (See sections 137.1 and 137.2 of the *Criminal Code Act* 1995.)

Penalty: 12 months imprisonment



The Privacy Act 1988 (Cth) (the Privacy Act) imposes obligations on the ACMA in relation to the collection, security, quality, access, use and disclosure of personal information. These obligations are detailed in the Australian Privacy Principles.

The ACMA may only collect personal information if it is reasonably necessary for, or directly related to, one or more of the ACMA's functions or activities.

The purpose of collecting the personal information in this form is to ensure the supplier is identified in the 'declaration of conformity'. If this declaration of conformity is not completed and the requested information is not provided, a compliance label cannot be applied.

Further information on the Privacy Act and the ACMA's privacy policy is available at www.acma.gov.au/privacypolicy. The privacy policy contains details about how you may access personal information about you that is held by the ACMA, and seek the correction of such information. It also explains how you may complain about a breach of the Privacy Act and how we will deal with such a complaint.

Should you have any questions in this regard, please contact the ACMA's privacy contact officer on telephone on 1800 226 667 or by email at privacy@acma.gov.au.



May 2023



Specialized Agricultural, Industrial & Turf Products

MANUFACTURER'S NOTICE OF COMPLIANCE AUSTRALIA WORK AND SAFETY ACT AND REGULATIONS OF 2011

The turf machine identified below was designed and manufactured by Harper Industries, Inc. headquartered in Harper Kansas, USA.

Hazard identification, Risk Assessment and Risk Reduction: Harper Industries has undertaken a hazard identification, risk assessment and risk reduction procedure on a sample of the product and model identified below. The procedure undertaken followed the principles identified in the Australian safety standard AS/NZS 4024.1201 – Safety of machinery – General principles for design – Risk assessment and risk reduction. The procedure followed meets the requirements specified in the Occupational Work and Safety Regulations 2011 as amended for the design and manufacture of plant. The machine has been designed and manufactured to comply with the relevant and applicable industry safety standards. Appropriate hazard elimination or control measures have been incorporated into the product design and specifications.

Health and Safety Information: An operator's manual, which includes instructions on the safe use of the machine, is provided with each machine. Product warning signs are affixed to the product where necessary.

Operator Noise Exposure: The sound level at the operator's station of ride-on equipment has been measured on a representative sample of a machine in accordance with ISO 5131, Annex B or equivalent standard. The sound level depends upon the machine operating conditions such as engine and travel speed, as well as the condition and maintenance of the machine.

Operator Station Sound Level: 83 d(B)A

Product Description	Pull Type Turbo Vac	
Model Number(s)	Tv60RE - 914015	
Manufacturing Unit	Harper Industries Inc., Harper, Kansas, USA	
Authorized Representative Signature	J. Begott	
Name	Joe Biggerstaff, VP Engineering	
Date	10/3/2025	

151 E. US Hwy 160 Harper, Kansas 67058, USA www.harperindustries.com

620.896.7381

620.896.7129

6 800.835.1042





Specialized Agricultural, Industrial & Turf Products

MANUFACTURER'S NOTICE OF COMPLIANCE NEW ZEALAND HEALTH AND SAFETY at WORK (GENERAL RISK AND WORKPLACE MANAGEMENT) REGULATIONS OF 2011

The turf machine identified below was designed and manufactured by Harper Industries, Inc. headquartered in Harper Kansas, USA.

Hazard identification, Risk Assessment and Risk Reduction: Harper Industries has undertaken a hazard identification, risk assessment and risk reduction procedure on a sample of the product and model identified below. The procedure undertaken followed the principles identified in the Australian safety standard AS/NZS 4024.1201 – Safety of machinery – General principles for design – Risk assessment and risk reduction. The procedure followed meets the requirements specified in the Health and Safety at Work Regulations 2016 as amended for the design and manufacture of plant. The machine has been designed and manufactured to comply with the relevant and applicable industry safety standards. Appropriate hazard elimination or control measures have been incorporated into the product design and specifications.

Health and Safety Information: An operator's manual, which includes instructions on the safe use of the machine, is provided with each machine. Product warning signs are affixed to the product where necessary.

Operator Noise Exposure: The sound level at the operator's station of ride-on equipment has been measured on a representative sample of a machine in accordance with ISO 5131, Annex B or equivalent standard. The sound level depends upon the machine operating conditions such as engine and travel speed, as well as the condition and maintenance of the machine.

Operator Station Sound Level: 83 d(B)A

Product Description	Pull Type Turbo Vac	
Model Number(s)	TV60RE - 914015	
Manufacturing Unit	Harper Industries Inc., Harper, Kansas, USA	_
Authorized Representative Signature	J Digo	
Name	Joe Biggerstaff, VP Engineering	
Date	11/4/2025	

151 E. US Hwy 160 Harper, Kansas 67058, USA www.harperindustries.com

620.896.7381

620.896.7129

**** 800.835.1042



IIIHARPER'INDUSTRIES,INC.

EC Declaration of Conformity according to the EC Machinery Directive 2006/42/EC, Annex II 1.A

Manufacturer:

Harper Industries Inc. 151 E US Highway 160 Harper, Kansas, USA, 67058 Phone: +1 (620) 896-7381

Person established in the Community, who is authorized to compile the technical file:

ProDoku

Hartmut Hartmann, Dipl.-Ing. (FH)

Wersener Holz 2a D-49504 Lotte

Phone: +49 (0) 5404 / 5637 Mobil: +49 (0) 176 / 10590693

Email: Hartmut.Hartmann@prodoku.com

Description and identification of the machinery:

Machine Type: Turf Vacuum Sweeper

Model(s): TV60RE

Serial Number: NNNNNNN

Measured Sound Pressure Level: 83dBa

It is expressly declared, that the machinery fulfills with all the relevant provisions of the following EC directives:

Directive 2006/42/EG Directive on machinery

Published in the Official Journal of the European Union, L 157/41 of

9.6.2006

Directive 2000/14/EC Directive on noise emission in the environment by equipment for use

outdoors

Published in the Official Journal of the European Union, L 162 of

3.7.2000

Directive 2005/88/EC Amending Directive 2000/14/EC

Published in the Official Journal of the European Union, L 344/44 of

27.12.2005

Place of the declaration: Harper, Kansas, USA

Date of the declaration: 3 October 2025

Signature: Joe Biggerstaff

Title: Vice President, Engineering



Table of Contents

OPERATOR SECTION	
To the Owner or Operator	1
Warranty Statement2-	-3
Declaration of Conformity AU & NZ/ 4-	-7
Declaration of Conformity EC	8
Table of Contents	9
	10
Feature Identification	
TV60RE11-1	12
General Safety Guidelines	' -
· · · · · · · · · · · · · · · · · · ·	13
	13
	13
	13
0 1	13 14
2 4111.9 2 51 1122 51 1131115114115	
Safety Decals15-1	
·	18
	18
,	18
Specific Safety Guidelines	
	19
Set-up and Operation	
	19
Starting Operation2	20
	20
Unloading Hopper2	20
Towing	21
Adjustments	
	22
	22
	23
	23
Remote and Receiver24-2	
Service & Maintenance	
	27
	 27
	- <i>i</i> 28
	28
	28
Return Air Screens 2	20 20
	29
	30
	31
Troubleshooting	32

PARTS SECTION Frame Frame Assembly......35-36 Wheel Assembly..... Deck Arm Assembly..... Attaching Deck Arms..... 39 **Blower Installation** Fan Assembly..... Fan Shaft Assembly..... Fan Housing Assembly..... 43 Blower Housing Installation..... 44 Fan Housing Installation..... 45 Air Return..... 46 Seal & Trim Installation..... 47 **Hopper and Door Assemblies** Sight Window Installation..... 49 Screen Installation..... 50 Lift Lock Installation..... 52 Door Latch Installation..... 53 Door Installation..... 54 Door Assembly..... 55 **Hydraulics Installation** Hydraulic Pump Assembly..... 57 Hydraulic Reservoir..... 58 Broom Hydraulic Assembly..... 59 Hopper Lift & Door Latch Hydraulics.....60-61 Valve Assembly..... Hydraulic Schematic..... **Engine Installation** Engine Assembly..... 64 Electric Clutch Kit..... 66 Engine Installation..... 67 Engine Fuel, Emissions & Electrical..... 68 Engine Service Parts..... 69 **Electronics Installation** 70 Electronics Installation..... Control Panel Assembly..... 71 Wiring Schematic (Kar-Tech Remote)..... 72 Engine Harness Schematic..... 73 **Decals and Final Installation** Export Kit..... 74 Final Installation..... 75 Decal Installation (Left)..... 76 Decal Installation (Right)..... 77 Decal Installation (General)..... 78 **Options** Broom Kit..... 79 Broom Assembly..... Finger Rotor Kit..... 81 Finger Rotor Assembly..... Fence Brush Option......83-84 Edge Brush Instructions.....



Specifications

Noise Levels	• 83dBa
Safety Features	Locking safety latches on all cylinders for service functions
	- Engine automatically returns to idle while dumping
Power	†Kohler gasoline engine
Hydraulic System	Belt-driven pump powers broom and cylinders
Hydraulic Reservoir	5 gallons, Crown AW46
Blower Drive	Dual Powerband belt drive w/ electric clutch
Blower Fan	25" diameter fan of abrasion-resistant steel
Housing Liner	• 1½" shaft with self-aligned bearings supporting both ends
	Easy access to housing liner* for inspection and replacement
	*UHMW poly-liner - Ultra High Molecular Weight Polyethylene
Broom Drive	Hydraulic motor – direct drive
Broom	17" diameter X 60" wide pick-up broom with heavy-duty
	polyethylene bristles and adjustable gauge wheels
Bearings	Greasable bearings and sealed bearings
Hopper	7 yard capacity
Wheels/Tires	6-bolt steel wheels
	• Turf Tires – 26 x 12 (standard)
	• Radial Tires – 225 X 60R15 steel belted (available as an option)
Controls	Wireless RF (radio frequency) remote controls
Discharge	Hydraulic dump with automatic latch mechanism
Hitch	Adjustable height tongue with ball hitch
Paint Durable 2-part polyurethane	
Dimensions	164" long X 85" wide X 85" high
Weight 2300 lbs – 1046 kg	
Hitch Weight 675 lbs – 306 kg	
Fuel	6 gallon capacity - Gasoline

† Kohler 23.5 HP (PA-ECH730-3092) used on: 22A15 & earlier, 22A36 & 22A99, 23A06 & 23A99, 24A11 & 24A38 26.5 HP (ECH749-3059) used on: 22A16-22A35, 23A01-23A05 26.5 HP (ECH749-3138) CARB used on: 24A01 & 24A39+


NOTE: Following publication of this manual certain changes in standard equipment and/or options may have occurred that would not be included in these pages. Your Harper/Goossen dealer is the best source for up-to-date information.



[•] Denotes common characteristics of both the TV60RE and TV60RH

Feature Identification

Model TV60RE

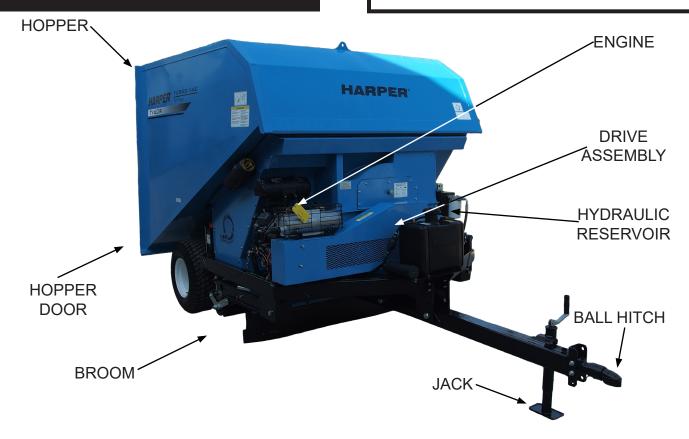

Hopper* – The hopper stores up to seven yards of collected material.

Hopper Door* – The hopper door opens when the door latches are opened.

Engine – A 23.5 HP Kohler EFI engine powers the drive assembly.

Drive Assembly – The drive assembly powers the hydraulic pump and blower.


Hydraulic Reservoir – The hydraulic reservoir on a **TV60RE** has a 5 gallon capacity.

Broom* – The broom rotates to rake up the material from the turf.

Jack* – The jack supports the front of the Turbo Vac when it is not attached to a tow vehicle. During operation, the jack must be up, with the wheel removed and in the stow location.

Ball Hitch* – The TV60R is towed with a ball hitch. Unit is not approved highway towing.

Remote Controls* – A wireless transmitter allows functions of the Turbo Vac to be controlled from the tow vehicle. The old style remote transmitter used two AA batteries, the new version is rechargeable. The two systems are not interchangeable/compatible.



* Denotes common features of both the **TV60RE** and **TV60RH**.

See Adjustments section for information on the sleep function with the remote and transmitter.




TV60RE - 23.5 HP Kohler Engine





TV60RE - Hydraulic System & Fill Locations

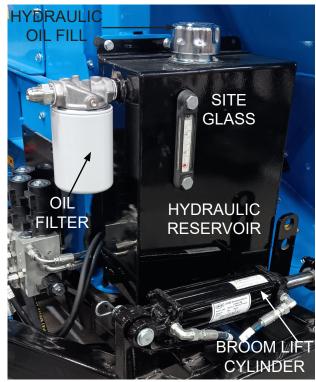

Hydraulic Reservoir Assembly



Fuel Tank



General Safety Guidelines

Equipment & Controls

- Before operating this equipment, read and understand the Owner's Manual.
- Altering the unit in any way that adversely affects its safe operation, performance or durability will void the warranty and may cause hazardous conditions.
- Know the location and function of all controls and how to stop the equipment quickly in an emergency before you operate the Turbo Vac.
- Keep all nuts, bolts and screws tight to ensure safe operation of equipment.

Guards & Shields

- Keep all safety devices in place and in good operating condition.
- Replace all worn, damaged, unusable, missing or lost safety shields and guard before operating unit.

Before Operation

- Do not allow children near this machine.
- Make sure bolts in tongue are secure and jack is in the transport position.
- Ensure tires are inflated to air pressure listed on side of tire.
- Engine governor settings are preset and should not be changed; any change can damage moving parts and void warranty.
- Before starting the machine, visually inspect all nuts, bolts and other fasteners to see that they are properly secured.
- Nuts, bolts and other fasteners should be checked after the first hour of operation and every 8 to 10 hours there after for proper alignment and tightness.
- Make sure that all belts are in good condition, and replace if necessary.



During Operation

- While operating the equipment, make sure that no foreign objects such as rocks, bottles or other hard materials are in the path of the Turbo Vac.
- If an object should strike the broom or blower mechanism causing an unusual noise or vibration, shut the engine off immediately and allow it to come to a complete stop. Disconnect the spark plug wire from the spark plug of the power unit, and do the following:
 - 1. Inspect for damage.
 - 2. Repair or replace damaged parts.
 - 3. Check for and tighten any loose bolts, nuts, fasteners or parts.
- Keep the engine area clean and free of debris and other accumulations.
- If the Turbo Vac should become clogged, shut off the engine and allow it to come to a complete stop. Disconnect the spark plug wire from the spark plug of the power unit before attempting to remove the clog.
- After use, use provided wheel chocks for parking.



SAFETY WARNING!



Always keep a fire extinguisher near the Turbo Vac during operation and service.



SAFETY WARNING!



To prevent possible eye injury, always wear SAFETY GLASSES while operating or servicing the equipment.



SAFETY WARNING!



Noise levels are noted but depend upon machine towing unit. Use appropriate hearing protection.



SAFETY WARNING!




When working under the hopper the cylinder safety lock should be engaged to prevent the hopper from falling.

During Service & Maintenance



 To engage the cylinder safety lock, take the pin out of the bracket on the hopper and pull the handle down.



- The cylinder safety lock prevents the hopper from being lowered so that maintenance can be performed safely.
- When finished working under the hopper, disengage the safety lock, put the handle back into the bracket on the hopper and replace the pin.

Λ

SAFETY WARNING!



Attempting to lower the hopper while the cylinder safety lock is engaged may cause damage to the cylinder and/or the safety lock mechanism.

A

SAFETY WARNING!



If it is necessary to get between the hopper and the hopper door, set the door prop to avoid being pinched.

 To set the door prop, pull the door open and insert prop into pre-cut hole in door.





Safety Decals

- If safety related or instructional decals become illegible or are removed, replace them immediately.
- If parts are replaced, make sure all safety related or instructional decals are present before the equipment is operated again.
- New decals may be obtained from your local Harper dealer.



5. Tie down point



6. Read manual before starting/operation



7. Safety alert



8. Hand can be entangled in moving parts



9. Contacting moving parts will cause injury



10. Shut off equipment before servicing

Safety Symbols

MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

1. P65 Warning



2. Recycle the battery



3. Engine prime bulb



4. Fuel Tank



11. Don't enter machine while it's running



17. High pressure spray can erode flesh



12. Don't remove safety shields during operation



18. Stay safe distance from machine in use



13. Hopper can come down on operator



19. Don't enter while door is loose



14. Hot surface can burn fingers or hands



20. Don't stand behind machine



15. Shut off equipment before servicing



21. Don't use for lifting machine



16. High pressure fluid skin injection danger



22. Never tip machine on slope or soft ground





23. Install cylinder safety lock before servicing



24. Insert prop rod



25. Machine height



26. Machine height with raised hopper



27. Crush hazard behind swinging door



28. Pinch hazard entering with swinging door



Replacement Parts



SAFETY WARNING!



Use genuine factory parts or parts with equivalent characteristics including: type, strength and material. Failure to do so may result in voidance of warranty, product malfunction or possible injury to operator and others.

- Replace locknuts and locking screws if they can be tightened without considerable resistance for several turns before they are completely tight.
- If hardware is not secure, or if some of the fasteners are over-tightened, equipment failure may result, posing possible safety hazards.
- Use proper torque specifications for all fasteners when they are replaced.

Gasoline



SAFETY WARNING!



Gasoline is extremely flammable and can be highly explosive.

- Always use an approved container for gasoline.
- Do not allow open flames or sparks while performing maintenance or refueling.
- Never remove the fuel tank cap or add gasoline when the engine is running or while it is hot.
- Never fill the fuel tank indoors. Gasoline fumes are heavy and will sink to the lowest point, collecting and becoming increasingly hazardous. One part gasoline in 20 parts air will explode easily and violently.
- Wipe up spilled gasoline immediately.
- Do not store gasoline in a room with an appliance that has a gas pilot or electrical switch that may cause sparks.

- Always store gasoline outside in a safety can (a can that has a flame arrester and pressure relief valve in pour spout).
- Never store the equipment with gasoline in the tank inside a building where fumes may reach an open flame or spark.
- Allow the engine to cool before storing in any enclosure.
- Be certain to provide adequate ventilation if an engine must be run indoors exhaust fumes are dangerous.

Hydraulics



SAFETY WARNING!



High pressure fluid. Escaping fluid under pressure can penetrate skin and cause serious injury or death.

To prevent serious injury or death:

- Relieve pressure on system before repairing, adjusting or disconnecting.
- Wear proper hand and eye protection when searching for leaks.
- Use wood or cardboard instead of hands when looking for leaks.
- Keep all hoses, fittings and components in good repair.
- Do not use any type of heat or flame (welding, soldering, cutting torch, etc.) near pressurized hydraulic lines.



Specific Safety Guidelines

TV60RE

- Be sure to provide adequate ventilation if the engine must be run indoors exhaust fumes are very dangerous.
- The Turbo Vac hydraulic system operates under high pressure. Be sure the hydraulic system is disabled prior to service.
- Periodically clean area around engine to lessen the possibility of fire.
- The engine governor should not be adjusted; any change can damage moving parts and void warranty.
- Keep clothing and all body parts away from rotating parts.

Gasoline is extremely flammable and can be highly explosive.

- Always use an approved container for gasoline.
- Do not allow open flames or sparks while performing maintenance or refueling.
- Never remove the fuel tank cap or add gasoline while the engine is running or hot.
- Refer to the engine manual for additional information on gasoline.

The battery on Turbo Vacs with electric start can produce explosive gasses.

- Ventilate when charging battery or using in an enclosed space.
- DO NOT produce sparks from cable clamps, tools, or other sources.
- DO NOT allow flames or smoking in the vicinity of the battery.
- Shield eyes when working near battery.

Set-Up and Operation



SAFETY WARNING!



Wear approved eye protection and safety gear during set-up and operation of the Turbo Vac.

TV60RE

- 1. Fill the tank with gasoline. (Refer to engine manual for gasoline specifics.)
- 2. Attach the unit to the tow vehicle. Be sure that the Turbo Vac is level with the ground. (Refer to the Adjustments section for information on leveling.)
- Pull choke and turn key to start position and release as soon as the engine starts.
 DO NOT TURN THE STARTER OVER FOR MORE THAN 10 SECONDS.
- 5. Once the engine is running, gradually move the choke lever to the off position, and allow the engine to warm up. (When restarting a warm engine, it should not be necessary to use the choke lever.)



Never remove the fuel tank cap or add gasoline when the engine is running or while it is hot.

6. The engine will automatically throttle up to operating speed when the blower and broom are engaged.



SAFETY WARNING!



Periodically clean material away from engine to lessen the possibility of fire.



Starting Operation

Before operating the Turbo Vac, perform the daily inspection as described in the Service & Maintenance section. The operator should be familiar with the area to be swept and make sure it is clear of large debris.

- 1. Push the switches on the remote control or move the manual switches to activate the functions on the Turbo Vac.
- 2. Engage the tow vehicle and advance slowly at first to test environmental conditions and machine performance.
- 3. Proceed with caution, steering clear of obstacles that could damage broom.

Check overhead clearance during use.
Clearance is: 7' 6" for sweeping
8' 6" for dumping



SAFETY WARNING!



Wear approved eye and ear protection while operating the Turbo Vac.

Keep all guards in place during operation. Never operate the Turbo Vac with safety shields removed.

Always keep a fire extinguisher near the Turbo Vac during operation.

Stopping Operation

- Push the BLOWER and BROOM switches on the remote control to turn off the TV60RE functions.
- 2. Shut off the engine and allow the machine to come to a complete stop.



SAFETY WARNING!



Do not leave the Turbo Vac unattended, or attempt any service or inspection unless the machine has come to a complete stop, the engine has been shut off, and the spark plug has been disconnected.

Unloading Hopper

- 1. Check the overhead clearance. 8' 6" is required for dumping.
- 2. To unload, press the OPEN LATCH and LIFT HOPPER buttons on the remote.
- 3. When unload is complete, press the LOWER HOPPER button. Once the hopper has lowered completely, press the CLOSE LATCH button.



SAFETY WARNING!



Do not stand near the back of the Turbo Vac while unloading.

If there is grass stuck in the hopper, do not go in between the hopper and the door without setting the safety lock.




Towing

A SAFETY WARNING!

The Turbo Vac does not meet highway safety codes. Tail lights, turn signals and safety chains must be attached before towing on public roadways.


 Close the clamp around the ball and secure with the lock collar. Insert the pin to keep the lock collar in place.



• The jack should be up whenever the Turbo Vac is connected to a tow vehicle.



 Always use the safety pin to lock the broom lift when towing the unit.




- Tires should be aired up to the proper tire pressure listed on the side of tire.
- Make sure the wheel lug nuts are tight.


Adjustments

Level Hook-Up

- For the Turbo Vac to work properly, the frame needs to be level with the ground.
- The tongue can be moved up or down depending on which set of holes on the frame are used.



 The hitches on different tow vehicles vary in height, so there are adjustments on the hitch and the tongue to keep the Turbo Vac level.



Broom Height


 The broom height should be adjusted so that the broom barely touches the grass.




- Broom height is easily adjusted tightening or loosening the nuts on the broom height adjustment.
- Make sure that both broom wheels (one per side of unit) are adjusted the same so the broom stays level.
- Brooms are originally 17" in diameter.
- When the broom wears down to 15" the adjustment will not lower the broom enough for it to perform adequately and the broom needs to be replaced.



TV60RE Blower Drive Belt

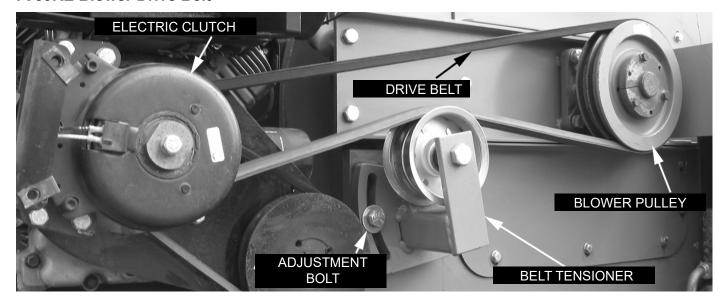


 To adjust belt tension, loosen the adjustment bolt and the bolt where the tensioner pivots. Position the tensioner to allow for proper deflection. Retighten both bolts.



- Apply 7 lbs. of pressure to the midpoint between the electric clutch and blower pulley. The belt should deflect ½ in.
- Too much tension (minimal deflection) can damage the belt and bearings. Too little tension (excessive deflection) will allow belt to slip and decrease blower performance.
- To replace the drive belt, loosen the belt tensioner and remove the old belt. Install the new belt, and follow the same procedure for adjusting tension as described previously.
- Inspect the belts frequently and maintain the correct tension and alignment.

TV60RE Hydraulic Pump Belt

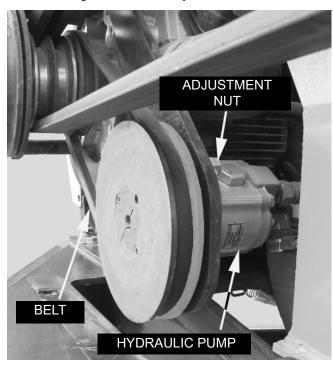

- To adjust the belt tension on the hydraulic pump, loosen the adjustment nut and the nut where the pump pivots.
- Position the pump to allow ½ in. deflection at the mid-point when 6 lbs. applied.Re-tighten both nuts.
- If a belt shows signs of wear, such as: fraying, cracking or missing pieces; replace it immediately.



Remote and Receiver

Operation

- Turn on the transmitter, press and hold the POWER button for at least 2 seconds and release.
- To turn the transmitter off, press and hold the POWER button until the LEDs stop blinking.
- The transmitter is designed with a power saving feature which turns the transmitter off after 15 minutes irrespective of receiver status.
- Transmitter and receiver have red and green LEDs. The green LED will double blink when no buttons are pressed, blink rapidly when a synched button is pressed, and will blink slowly if there is no communication (i.e. - no power to the receiver) when a button is pressed.
- The red LED on the receiver will blink if there is a shorted or open output.
- The transmitter's red LED blinks 1 time per second if the battery is low and needs charging.
- If transmitter is powered off or goes out of range, outputs will turn off and be disabled until power on and in range.

Synchronizing Transmitter and Receiver

Each transmitter and receiver pair is synchronized together at the factory. If a new transmitter is needed, synchronizing is required. Use the following procedure:

- 1. Make sure transmitter and receiver are off.
- With the transmitter off, press and hold the POWER button for more than 10 seconds. LEDs start blinking.
- 4. Turn on the receiver.
- 5. Wait several seconds until only the green LED on the transmitter blinks.
- 6. Teach complete.

Sleep Time

All transmitters have the ability to change the sleep time from the default to user's preference. The transmitter is factory set to turn off (sleep) after 15 minutes irrespective of receiver status. To change the time the transmitter waits before going to sleep, use the following procedure:

- With the transmitter off, press and hold buttons RAISE BROOM, LOWER BROOM, BROOM ON/OFF, & POWER (~ 5 seconds)
- 2. At this point, both lights will blink once per second. Release the buttons.
- 3. On the transmitter, press one of the following buttons to adjust the sleep time:
- LIFT HOP = 15 minutes
- LOWER HOP = 30 minutes
- RAISE BROOM = 60 minutes
- LOWER BROOM = 120 minutes
- BROOM ON/OFF = DISABLED
- 4. Sleep time programing complete.

Cloning Transmitters



SAFETY WARNING



Only one transmitter can be on at a time, they cannot be used simultaneously. Use caution.

Occasionally, it is desired to have more than one transmitter work with a single reciever. This is accomplished by a process called cloning. Cloning allows an additional transmitter (B) to have the same ID code as the original transmitter (A). If this feature is desired, use the following procedure:

- 1. Make sure both transmitters and the receiver are off.
- On Transmitter A, press and hold the POWER button for 10 seconds until LEDs blink, then release. Green and red LEDs will blink together at this point.
- 3. On Transmitter B, press and hold buttons LIFT HOP, LOWER HOP, and POWER simultaneously until both LEDs blink.



- 4. Wait for a few seconds until the green LED starts to blink on both transmitter A and transmitter B
- 5. Turn both the transmitters off.
- Synchronize one of the transmitters to the receiver using SYNCHRONIZING TRANSMITTER AND RECEIVER instructions.

If the cloning feature has been invoked and is no longer desired, the ID code of one of the transmitters needs to be changed. This will unclone the transmitters. If this is desired, use the following procedure:

- Make sure the transmitter is off.
- Press and hold hold LOWER HOP, RAISE BROOM, BLOWER ON/OFF and POWER buttons for 5 seconds.
- Release all the buttons when GREEN and RED LEDs start toggling.
- Press any button and release. GREEN LED should start to double-blink.
- ID change Sequence complete.

SPECIFICATIONS

RF: 2.4GHz FHSS 100mW

Temperature:


o Receiver: -40 to +85°C o Transmitter: -20 to 60°C


- Transmitter Power: 3.7V LiPo rechargeable battery, Battery life: 30-40 hours continuous
- Micro-USB Charger Port

Receiver Power: 9-30V DC

SN: 25A49+ come standard with the 2.4GHz remote systems. Old remote systems and the 2.4 GHz components are NOT compatible. Reference **page 71.**


BUTTON PRESS	ENGAGE OUTPUTS
LOWER HOPPER	А
LIFT HOPPER	В
LOWER BROOM	С
RAISE BROOM	D
CLOSE	E
OPEN	F
BLOWER ON/OFF	G (LATCHING)
BROOM ON/OFF	H (LATCHING)

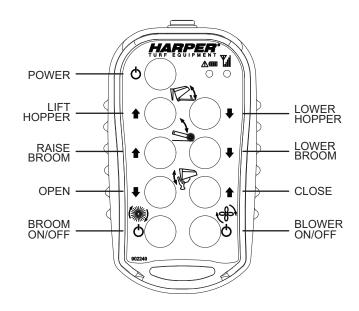

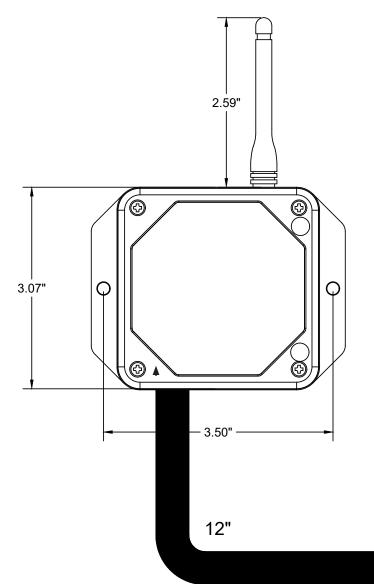

TRANSMITTER ERROR CODE CHART		
ERROR CODE	PROBABLE CAUSE	
1	LOW BATTERY	
2	FAULTY CIRCUIT TO OUTPUT B	
3	FAULTY CIRCUIT TO OUTPUT A	
4	FAULTY CIRCUIT TO OUTPUT D	
5	FAULTY CIRCUIT TO OUTPUT C	
6	FAULTY CIRCUIT TO OUTPUT F	
7	FAULTY CIRCUIT TO OUTPUT E	
8	FAULTY CIRCUIT TO OUTPUT H	
9	FAULTY CIRCUIT TO OUTPUT I	

ERROR CODE NUMBER IS THE NUMBER OF RED LIGHT BLINKS BETWEEN EVERY PAUSE

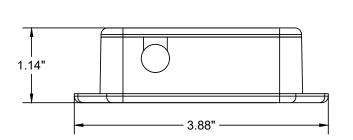

CONN:055-157-1200 CABLE: 020-050-1218		
PIN	DESCRIPTION	
1	POWER (9-30V)	
2	GROUND	
3	OUTPUT A	
4	OUTPUT B	
5	OUTPUT C	
6	OUTPUT D	
7	OUTPUT E	
8	OUTPUT F	
9	OUTPUT I	
10	OUTPUT G	
11	OUTPUT H	
12	INPUT J	



Service & Maintenance



SAFETY WARNING!



Before servicing or inspecting the Turbo Vac, make sure the power source is shut off and all moving parts have stopped.



SAFETY WARNING!



Disconnect the spark plug wire or the negative battery cable to prevent the engine from being turned on.



SAFETY WARNING!



Always wear safety glasses and protective gloves when servicing the Turbo Vac.

Break-in Service

After the first hour of use:

- Check belts. Tighten if needed.
- Tighten set screws on bearings.
- Check nuts, bolts, and fasteners to see that they are secure. Tighten if needed.
- Check hydraulic hoses and fittings for leaks using the method described in the General Safety Guidelines. Tighten or replace if needed.


Lubrication

Nine grease zerks in the following locations should be greased daily to reduce wear:


Hopper door latches (2)



Broom lift (2)



Blower shaft (2)



Note: The safety shield must be removed to access grease zerk on front blower shaft of the **TV60RE**.

- Broom shaft (1)
- Broom wheels (2)



Replace the safety shields before operating the Turbo Vac.



Hydraulic System

- The hydraulic system of the **TV60RE** is filled at the factory with Crown AW 46 hydraulic oil that has an ISO of 46.
- The **TV60RE** has a 10 micron, beta rated hydraulic oil filter designed for long life.

The following list of hydraulic fluids can mixed with Crown Hydraulic Fluid. MIXING OILS NOT ON THIS LIST COULD CAUSE GELLING AND DAMAGE TO THE HYDRAULIC COMPONENTS. If another type of oil is desired, then the system must be completely drained and flushed first.

Appropriate replacements:

ISO 46: Recommend for running in ambient air temperatures of 32°F-110°F, and it contains a kinematic viscosity rating around 46 cSt at 40° C. (1cSt = 1mm²/s)

- Mobil DTE 25
- Mobil DTE 15M
- Amoco Rykon Premium Oil ISO 46
- Chevron Rykon Premium Oil ISO 46
- Conoco Hydroclear AW MV 46
- Exxon Univis N 46
- Pennzoil AWX MV 46
- Shell Tellus 52 M46
- Shell Tellus 52 V46
- Texaco Rando HDZ 46

TV60RE Hydraulic Oil Reservoir


- Maintain the hydraulic oil between the upper and lower site bulbs at all times.
- Replace the spin-on oil filter (P/N 720043) every 250 hours of service.
- Replace Hydraulic oil every 500 hours.


Blower Liner

- Inspect the blower liner in the blower housing for wear every 8 hours.
- If the blower liner wears excessively, it could damage the blower housing.
- The blower liner is a wear item and is not covered under warrantv.
- Sandy conditions will shorten the life of the blower liner.

To check the blower liner:

- Raise hopper, set the safety lock as shown in the General Safety Guidelines.
- Check the blower liner as shown.
- If the liner is damaged or worn, replace it before it damages the blower housing.







SAFETY WARNING!



LINER

To inspect the liner, the power must be OFF, the unit has come to a complete stop, and the spark plug wire removed.



SAFETY WARNING!



When working under the hopper the cylinder safety lock should be engaged to prevent the hopper from falling.

Electrical Wiring

A 20 AMP fuse is located in the wiring harness (932061) near the starter solenoid.





Return Air Screens



- The return air screens do not require cleaning on a regular basis.
- Material that sticks to the screens during operation will fall off when the blower is stopped. However, if debris is extremely wet or muddy, plugging may occur.
- If there is a noticeable decline in ability to pick up debris, visually inspect screens for clogging and clean, if necessary.
- The return air screens may be cleaned with a broom or water hose, and may be removed, if necessary.


SAFETY WARNING!

When it is necessary to get between the hopper and the hopper door, set the door prop to avoid being pinched.

 To set door prop, pull the door open and insert prop into the pre-cut hole in door.



Lift Points for Servicing Wheels

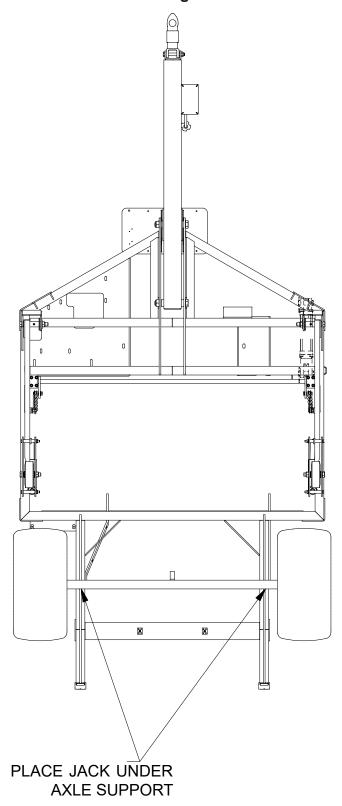



TV60RE Service Schedule

• Disclaimer – For the 23.5 HP engine, Kohler Engine Co. recommends the following:

Daily or Before Starting Engine	
Check engine oil level	SAE 10W-30
Check hydraulic oil level	Crown AW46 or equivalent
Fill fuel tank	Clean, unleaded, 87 octane or higher
Check air intake and cooling areas	
Visually inspect belts, bolts, fittings and hoses	
Grease	See Service & Maintenance section.
Check tire pressure	
Oncok are presented.	of the tire.
100 Hour Service – Perform these and all previous items:	or the the.
Check outer air cleaner element	Kohler nart # 25 083 01-S
(change if element appears dusty due to severe cond	·
Change engine oil	•
Remove cooling shrouds	•
Check battery	•
Change hydraulic filter	•
Change Tryuraulic liller	Wix part # 51551
200 Hour Carries Derform these and all provious items	Wix part # 51551
200 Hour Service – Perform these and all previous items:	Cat man to 0.76 mm (0.20 in)
Check spark plug	• • • • • • • • • • • • • • • • • • • •
	Kohler part # 12 132 02-S
OL 31 CH	Champion part # RC12YC
Change oil filter	Kohler part # 12 050 01-S
250 Hour Service	
Change outer air cleaner element	
Check inner air cleaner element	•
(change if element appears dusty due to severe cond	ditions)
Annual or 500 Hour Service – Perform these and all previous	ous items:
Have Bendix starter drive serviced.*	
Have solenoid shift starter disassembled and cleaned.*	
Change hydraulic oil	. 5 gallons
	Crown AW46 or equivalent
Change inner air cleaner element	Kohler part # 25 083 04-S
•	•

- Should be serviced by an authorized Kohler Dealer.
- Refer to Kohler engine manual for more information on engine servicing.
- The identification number of the 23.5 HP Kohler EFI engine is: PA-CH730-0142.



Standard Torque Chart

A

SAFETY WARNING!



Refer to the Standard Torque Chart whenever bolts, nuts or screws are tightened.


Size	In-Lbs	Ft-Lbs	N-m
No. 10-24	25-35	5-7	2.8-4.0
1⁄4 in.	60-80	18-20	7-9
5/16 in.	120-140	28-30	14-16
3/8 in.	340-360	64-74	24-27
½ in.		126-150	90-100

Note: When tightening two or more fasteners on the same part, DO NOT tighten the fasteners completely one at a time. To avoid distortion, first tighten all fasteners in sequence to one-third of torque value, then tighten to two-thirds of torque value, then tighten to full value.

Optional Equipment

Edge Brush

 A fence brush kit (900218) is available for cleaning areas along fences and curbs, etc., that are difficult to reach with the Turbo Vack broom.



- The fence brush can be adjusted vertically and horizontally, as well as rotated at an angle, so that debris is thrown into the Turbo Vac broom. For best results, angle the front edge of the brush downward.
- The stop chain is used to adjust the height of the fence brush during operation and to hold it up during transport.
- Never allow the brush to rest completely on the ground during operation.



SAFETY WARNING!



The Turbo Vac should never be transported with the fence brush in operating position. Always use the stop chain to suspend the brush during transport.



Troubleshooting

TVCODE Engine	
TV60RE Engine:	
Problem:	What to Check:
Engine will not start	 Improper control settings Engine may be low on fuel Engine may be low or too full of oil Battery charge may be too low Possible internal problems Manual fast idle switch may be engaged, switch must be shut off for engine to start.
Problem:	What to Check:
Engine shuts off during operation	Engine may be low on fuelEngine may be low on oilAir breather may be clogged
Belts:	
Problem:	What to Check:
Belts slip	Tension adjustmentExcessive loadLodged foreign materialSeized bearings
Problem:	What to Check:
Belts wear rapidly; Belts jump, catch or twist	Pulleys out of alignmentUse straightedge to check across pulley faces
Hydraulic System:	
Problem:	What to Check:
Hydraulic function will not respondor hold its position	RF receiver or transmitter malfunctioning Hydraulic cylinder seals worn, replace them



Parts

TV60RE

TV60R

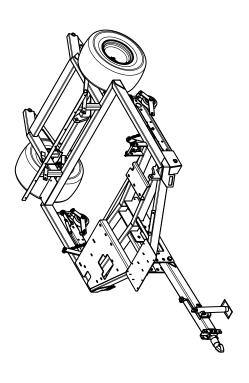


Table of Contents

PARTS SECTION Frame	
Frame Assembly35	- 2
	3.
Wheel Assembly	3
Deck Arm Assembly Attaching Deck Arms	
Attaching Deck Arms	39
Blower Installation	4
Fan Assembly	•
Fan Shaft Assembly	4:
Fan Housing Assembly	4
Blower Housing Installation	4
Fan Housing Installation	4
Air Return	40
Seal & Trim Installation	4
Hopper and Door Assemblies	
Sight Window Installation	49
Screen Installation	50
Lift Lock Installation	5
Door Latch Installation	5
Door Installation	5
Door Assembly	5
Hydraulics Installation	
Hydraulic Pump Assembly	5
Hydraulic Reservoir	58
Broom Hydraulic Assembly	59
Hopper Lift & Door Latch Hydraulics60)-6
Valve Assembly	6
Hydraulic Schematic	6
Engine Installation	
Engine Assembly	64
Electric Clutch Kit	6
Engine Installation	6
Engine Fuel, Emissions & Electrical	68
Engine Service Parts	69
Electronics Installation	
Electronics Installation	70
Control Panel Assembly	7
Wiring Schematic (Kar-Tech Remote)	7:
Engine Harness Schematic	7
Decals and Final Installation	
Export Kit	74
Final Installation	7
Decal Installation (Left)	7
Decal Installation (Right)	7
Decal Installation (General)	78
Options	
Broom Kit	79
Broom Assembly	8
Finger Rotor Kit	8
Finger Rotor Assembly	82
Fence Brush Option	
Edge Brush Instructions	.0-c. !8



KEV.					#000.	smaster	〈ΕΤ	T.	B	DMNT	IRE	LN:	MNT	JMNT	ıt
905131	Parts List	DESCRIPTION	BROOM LIFT CHAIN	SPRING	COUPLER, 2" FORGED 7000#	Tire & Wheel Assy, 26" Grassmaster	BROOM WHEEL BRACKET	CASTER WHEEL BOLT	BROOM LIFT BUSHING	WHEEL HEIGHT ADJ. WLDMNT	FRAME WLDMNT, TV60RE	BROOM LIFT WELDMENT	LEFT BROOM ARM WLDMNT	RIGHT BROOM ARM WLDMNT	Weldment, Tank Mount
		PART #	940126	942054	942184	943053	970067	970254	970370	975015	975095	975098	975121	975122	975175
		QTY	2	4	-	2	4	2	2	2	_	-	_	1	-
		ITEM	30	31	32	33	34	32	36	37	38	39	40	41	42
	Parts List	DESCRIPTION	NUT, 5/8-11, UNITORQUE LOCK	NUT, 7/16-14	NUT, 3/8-16 WIZ FLANGE	WASHER, 5/8" FLAT STANDARD	WASHER, 5/8" LOCK	WASHER, 7/16" FLAT STANDARD	WASHER, 3/4" FLAT STANDARD	NUT, 1-8, UNITORQUE LOCK	HUB COMPLETE, 35-6LM	GREASE ZERK, 1/4-28 ST	BUSHING, IGUS, FOOT PEDAL	BUSHING, 1.75 X 1 X .75E	CASTER WHEEL ASSY
		PART#	110639	110641	110645	110650	110655	110670	110677	111226	413001	510174	800128	922006	940043
		QTY	2	4	4	4	2	80	2	2	2	4	4	4	2
		ITEM	15	16	17	18	19	20	21	22	24	52	27	28	58
	Parts List	DESCRIPTION	HITCH PIN, 3/4 X 6 W/KEEPER	NUT, 5/8-11 JAM	WASHER, 1.25 OD X.75 ID X.075	BOLT, 3/8-16 X 1.25, WIZ FLANGE	BOLT, 7/16-14 X 1.75 GR 5 HEX HEAD	NUT, 7/16-14 WIZ FLANGE	U-BOLT, 5/16	BOLT, 1-8 X 7.0	BOLT, 3/4-10 X 6.0	BOLT, 7/16-14 X 4.0	BOLT, 5/8-11 X 4.5	NUT, 5/16-18 WIZ FLANGE	NUT, 3/4-10, UNITORQUE LOCK
		PART #	102015	110039	110068	110161	110321	110337	110362	110364	110383	110527	110562	110606	110625
		QTY	-	4	4	4	4	8	4	2	2	4	2	8	4
		ITEM	-	2	3	4	2	9	7	8	6	10	11	12	14
					_	_	_	_		_					_




WELDMENT, TV60R HD HITCH


975436

43


TV60RE FRAME ASSEMBLY

FRAME ASSEMBLY			905131 REV. E
			Parts List
	ITEM QTY	PART#	DESCRIPTION
	4 4	110161	BOLT, 3/8-16 X 1.25, WIZ FLANGE
	╀	110364	BOLT. 1-8 X 7.0
Zigit.	\vdash	110562	BOLT, 5/8-11 X 4.5
	12 8	110606	NUT, 5/16-18 WIZ FLANGE
	15 2	110639	NUT, 5/8-11, UNITORQUE LOCK
	17 4	110645	NUT, 3/8-16 WIZ FLANGE
	22 2	111226	NUT, 1-8, UNITORQUE LOCK
	24 2	413001	HUB COMPLETE, 35-6LM
<u>z</u>	25 4	510174	GREASE ZERK, 1/4-28 ST
8	28 4	922006	BUSHING, 1.75 X 1 X .75
	32 1	942184	COUPLER, 2" FORGED 7000#
33	33 2	943053	Tire & Wheel Assy, 26" Grassmaster
SEE WHEEL ASSEMBLY	2	970370	BROOM LIFT BUSHING
FOR MORF DETAIL	38 1	975095	FRAME WLDMNT, TV60RE
יייי אייייי אייייייייייייייייייייייייי	-	975098	BROOM LIFT WELDMENT
	42 1	975175	Weldment, Tank Mount
	43 1	975436	WELDMENT, TV60R HD HITCH
36			
99			
DETAIL A			
BROOM LIFT SHAFT ASSEMRIY VIEW			
י יידיי ייניייןטטל			

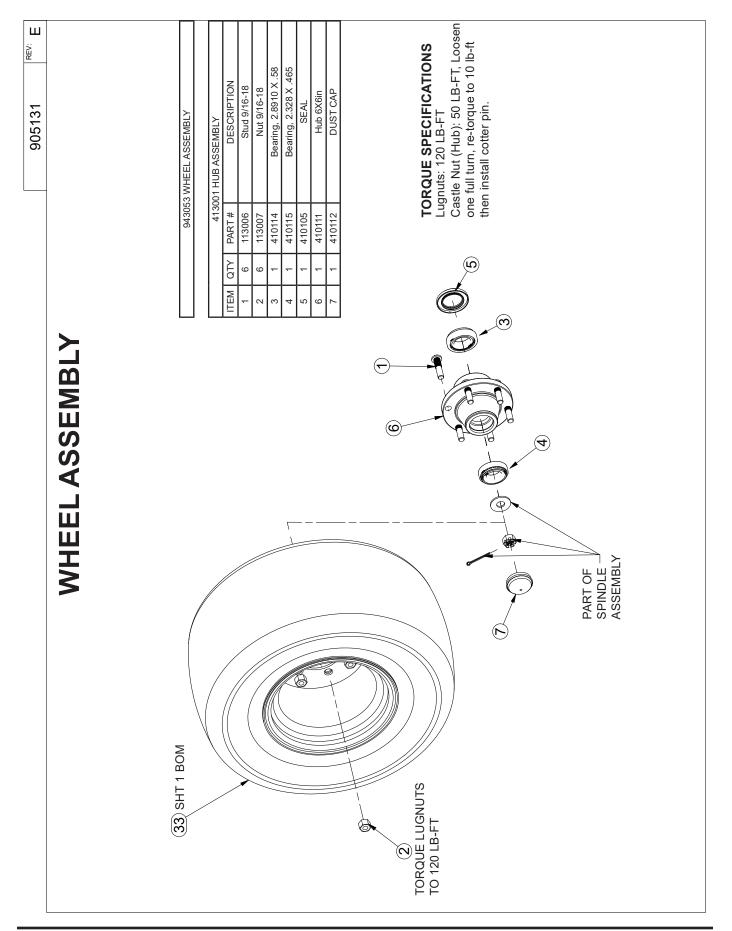

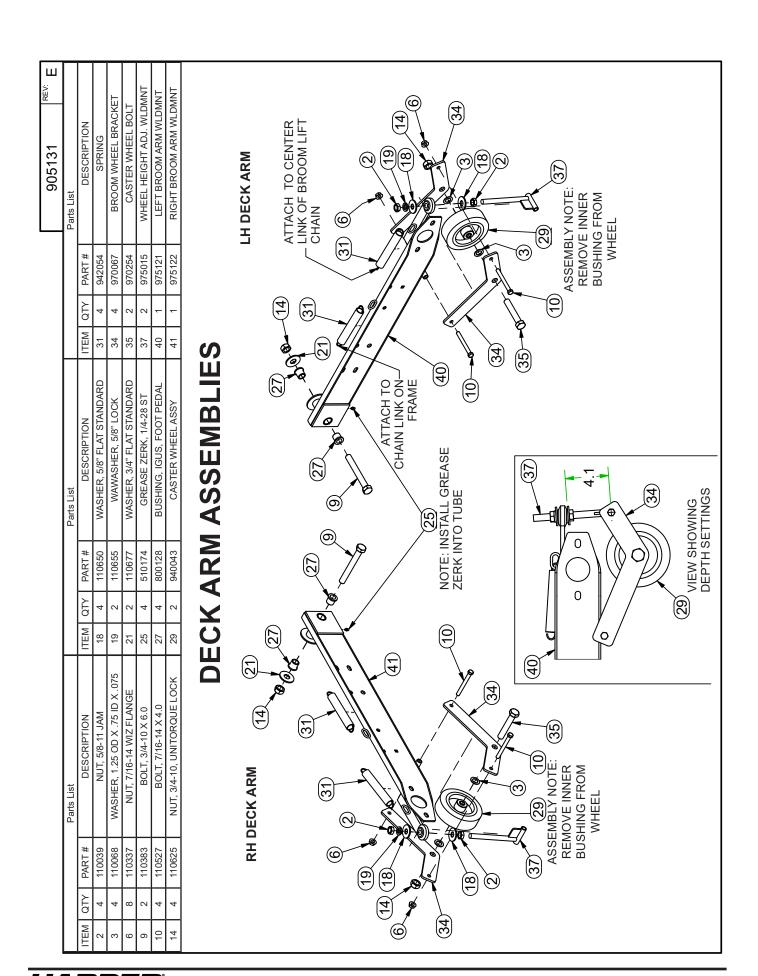





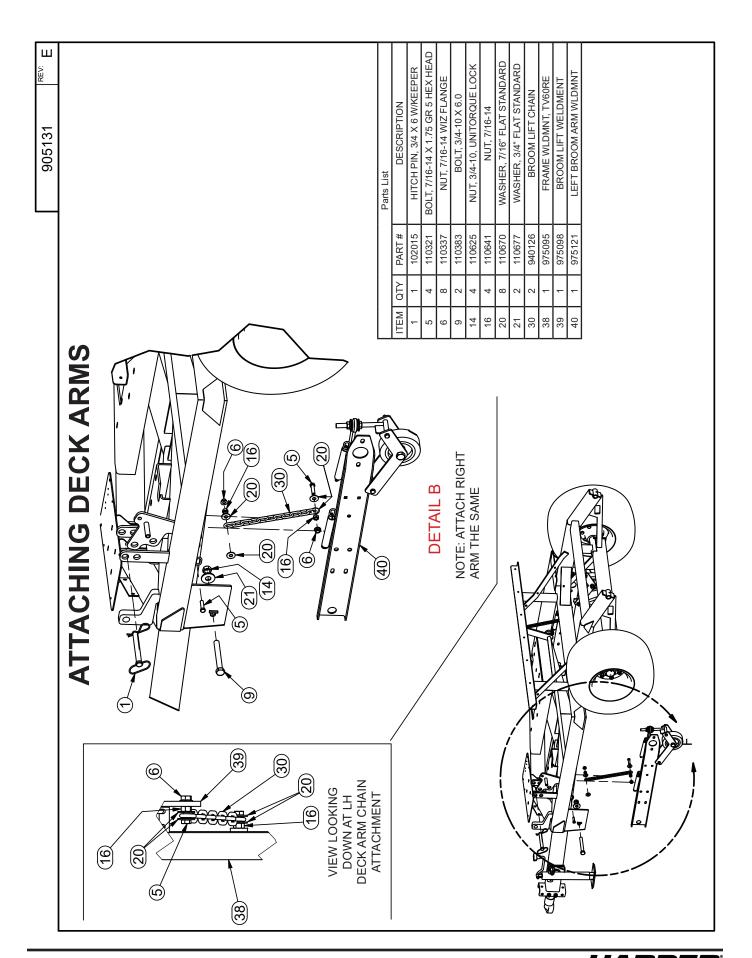


_	_	_	_	_	_	_			_	_	_	_	
					nner	Outer				wmr			ing, Eff
	Parts List	DESCRIPTION	Key, 3/8 X 5	Clamp Bar	Blower Liner Retainer, Inner	Blower Liner Retainer, Outer	Blower Shaft	Blower Plate	Debris Flap	Blower Liner250 Uhmw	Fan Assy Wldmnt	Bearing Channel	Weldment, Blower Housing, Eff
	H	PART#	940113	920086	970161	970162	970287	970558	972008	972010	975001	975102	302120
ı		ZIO	-	-	2	2	1	_	_	_	-	-	
	1	ITEM	21	22	23	24	25	26	27	28	59	30	
4.5	Parts List	DESCRIPTION	Nut, 1/2-13 Wiz Flange	Nut, 3/8-16 Gr 5	Bolt, 1/2-13 X 1.75, Wiz Flange	Swivel, Garden Hose-To-Pipe	Locknut, 3/4 Npt	Plug, Garden Hose	Bearing, 4fng 1 1/2"	Assembly, Nozzle Access Cover	Assy, Upper Fan Shield W/Decal	Assy, Lower Fan Shield W/Decal	
	: 	PART #	110588	110826	111222	302060	302061	302062	410851	905122	905194	905195	WER EMBLY
İ	ì	ΔTΥ	4	4	8	_	1	_	2	2	-	-	₽ E
		ITEM	1	12	13	14	15	16	17	18	19	20	S W
	Parts List	DESCRIPTION	Seal, .50 X .187	Setscrew, 3/8-16 X 1.25	Bolt, 1/2-13 X 1, Wiz Flange	Nut, 1/4-20 Wiz Flange	Nut, 5/16-18 U-Type .75I	Bolt, 1/4-20 X 1 In Carriage	Nut, 5/16x18 Wing	Bolt, 5/16-18 x 1.0	Bolt, 5/16-18 X 0.75, Wiz Flange	Bolt, 1/4-20 X 1.0	TV60RE BLOHOUSING ASS
	: H	-	4	110093	110220	110290	110319	110326	110327	110423	110444	110464	-
	-	-	10 ft	4	4	23	24	12	4	4	50	7	
		ITEM	_	7	က	4	2	9	7	∞	ဝ	10	

905132 REV: C			Parts List	DESCRIPTION	Seal, .50 X .187	Setscrew, 3/8-16 X 1.25 Bolt 1/2-13 X 1 Wiz Flance	Nut, 5/16-18 U-Type .75l	Bolt, 5/16-18 X 0.75, Wiz Flange	Nut, 1/2-13 Wiz Flange Nut, 3/8-16 Gr 5	Bolt, 1/2-13 X 1.75, Wiz Flange	Swivel, Garden Hose-To-Pipe	Locknut, 3/4 Npt Plua. Garden Hose	Bearing, 4fng 1 1/2"	Assy, Upper Fan Shield W/Decal	Assy, Lower Fan Shield W/Decal	Key, 3/8 X 5	Blowel Shalt Fan Assv Widmnt	Bearing Channel	Weldment, Blower Housing, Efi
				ITEM QTY PART#	10 ft	3 4 110220	- 24	20	12 4 110826	80	Н	- -	17 2 410851	-	_	21 1 940113	-	-	
	FAN ASSEMBLY	(12) (13) (13)		/			(25)	(21)				(5)			6				

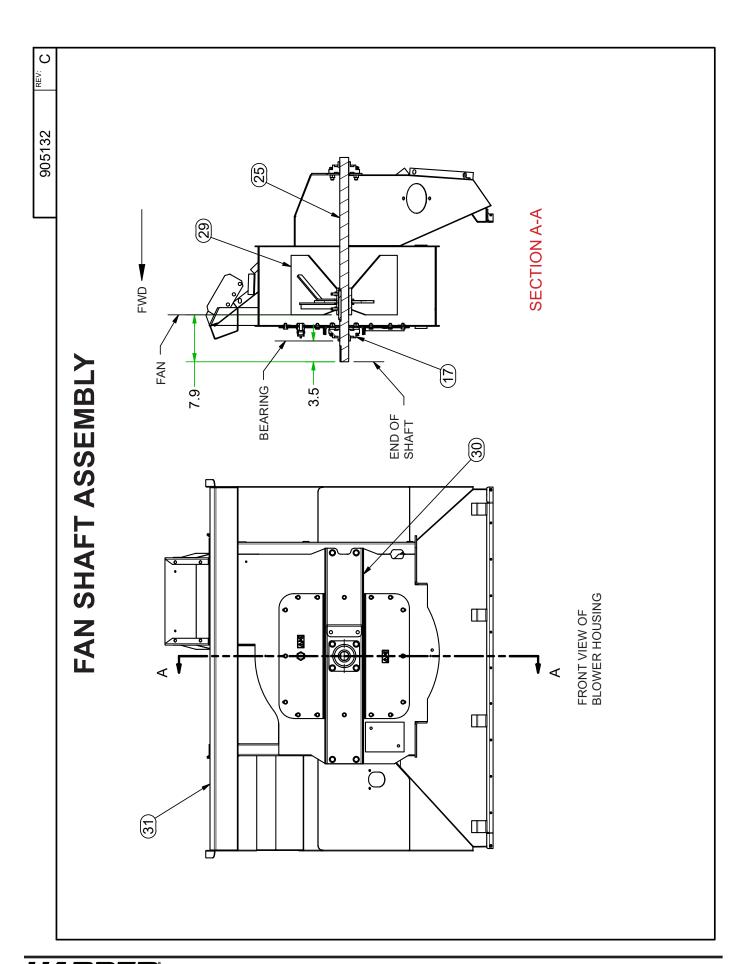


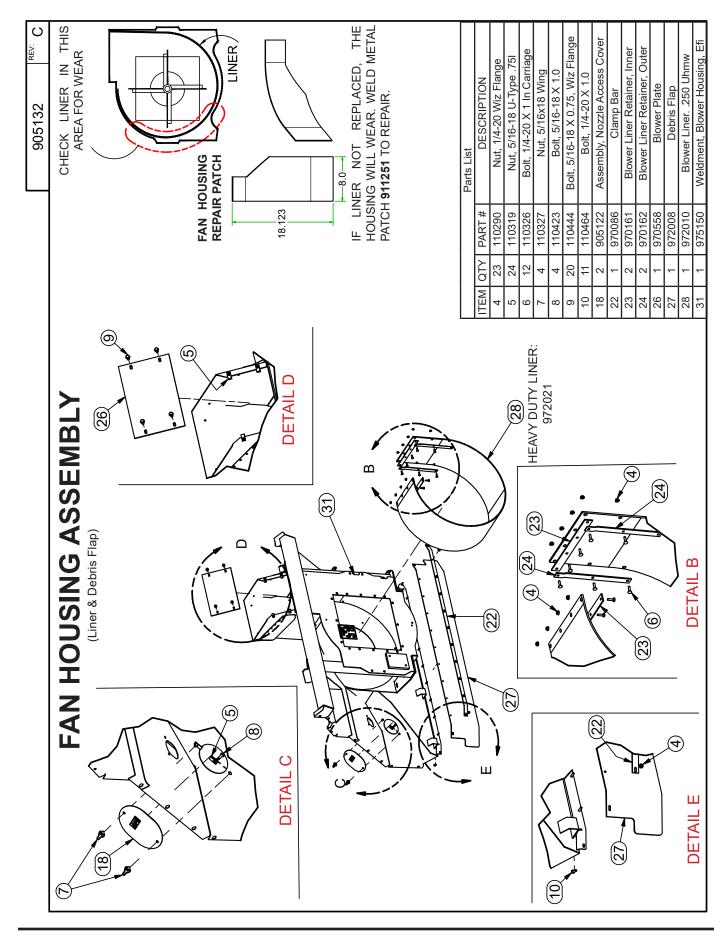


905133 REV: D		Parts List	DESCRIPTION Moulding, Edge, Air Inlet	Trim, Edge, .085 To .210 Thickness	Doi: 470.42 X 4.05 Wiz Elongo	Bolt, 1/2-13 X 1.25, Wiz Flange Nut, 1/4-20 Wiz Flange	Nut, 5/16-18 U-Type .75I	Bolt, 5/16-18 X 0.5, Wiz Flange	Bolt, 1/2-13 X 1.5 Bolt, 5/16-18 X 0.75, Wiz Flange	Bolt, 1/4-20 X 1.0	Nut, 1/2-13 Wiz Flange	Nut, 3/4-10	Nut, 5/16-18 Wiz Flange	Nut, 1/2-13, Unitorque Lock Bolt, 3/4-10 X 3.5 Tap	Assembly, Tv60re Blower Housing	Back Air Return	Left Air Return	Truss Bar	Flap Retainer	Rear Seal	Debris Flap Main	Right Air Return Shield	Hose Tube	
		-	PART # 100360	100365	110004	110290	110319	110426	110429	110464	110588	110596	110606	110615	905132	970390	970391	970393	970394	970545	970685	970882	975111	
	Z	<u> </u>	Ω ₩ 9	30 in	11.01	2 ه	41	2	ω 6 <u>6</u>	3 =	9	9	2	8 7	-	-	-	4	- 0	1 -	-	-	2	
	0		1TEM	2 6	2 -	5 2	9 1	_	ω σ	9 6	7	12	13	4 5	16	17	18	19	20	22	23	24	25	
	BLOWER HOUSING INSTALLATION																							

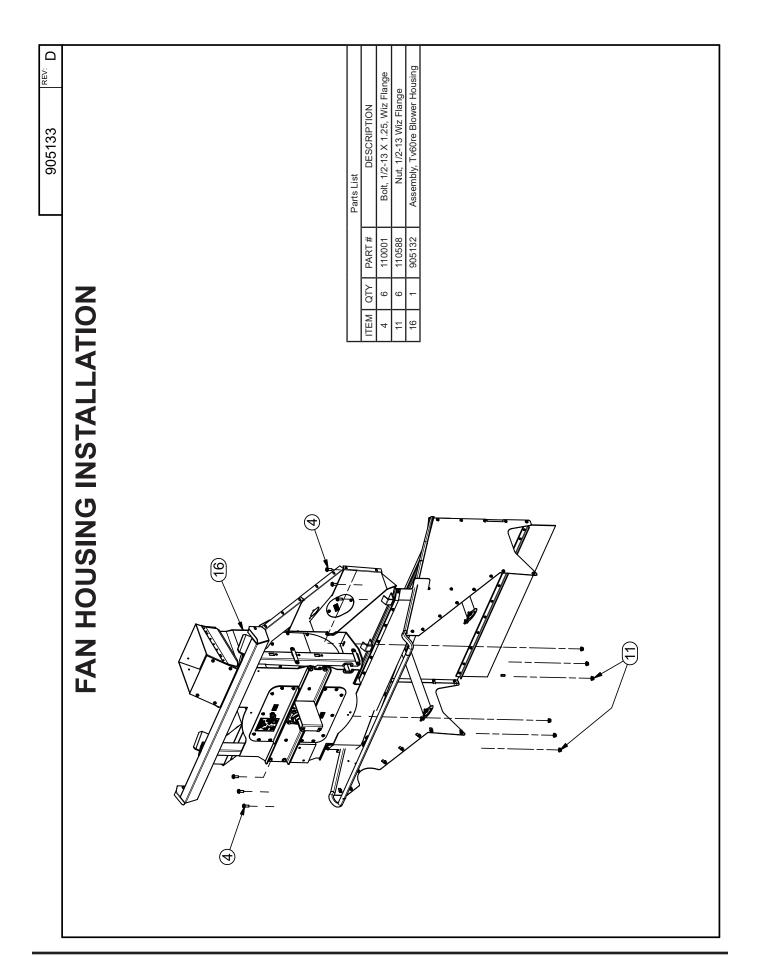

905133 REV: D							Parts List	DESCRIPTION	Nut, 1/4-20 Wiz Flange	Nut, 5/16-18 U-Type .75I	Bolt, 5/16-18 X 0.5, Wiz Flange	Bolt, 1/2-13 X 1.5	Bolt, 1/4-20 X 1.0	Nut, 3/4-10	Nut, 5/16-18 Wiz Flange	Nut, 1/2-13, Unitorque Lock	Back Air Return	Left Air Return	Truss Bar	Flap Retainer	Angle, Air Return	Debris Flan Main	Right Air Return Shield	Hose Tube	
			a					PART#	110290	110319	110426	110429	110464	110596	110606	110615	970390	970391	970393	970394	970542	970585	970882	975111	
								ΩTY	Ξ	41	2	ω 6	5 =	9	2	∞ ς	1 -	-	4	-	7	- -		2	
		(4) (4)	6					ITEM	2	9	7	∞ c	9 6	12	13	4 4 4	12	18	19	50	2	23 62	24	25	
	AIR RETURN	9 24 (19 (19		(15) DETAIL A	(22)				9									68							

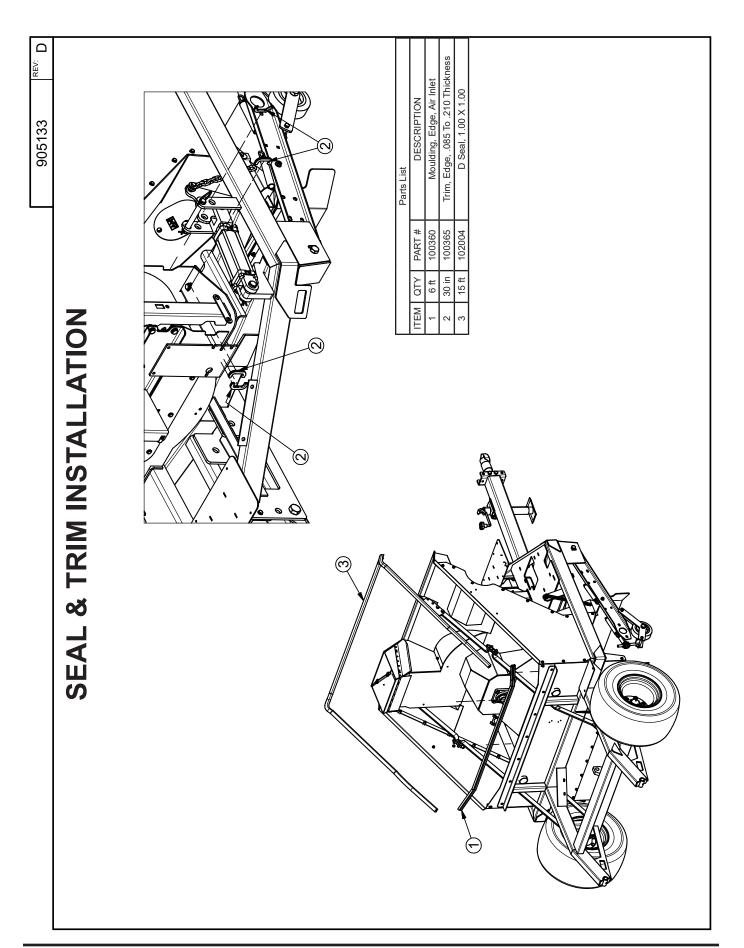



905135 REV: B		Parts List DESCRIPTION	SEAL, RUBBER, D 1' X 1'	Bolt, 5/16-18 X 0.75 in Carriage WASHER, 1" FLAT STANDARD	WASHER, 5/16" X 1 1/2 FENDER	Pin, Lynch 7/16 x 1 3/4 NUT, 5/16-18 U-TYPE .75L	BOLT, 5/16-18 X 1.0	NUI, 5/10-18, UNITORQUE LOCK NUT, 5/16-18 WIZ FLANGE	WASHER, 1/4" FLAT STANDARD	SCREW, 5/16-18 UNCX1 FH	SIGHT GLASS, HOPPER	Backing Plate, Sight Glass SCREW 1/4 X 1 TEK SELE-TAP	PIN, STABILIZER	BAR, PROP	MIDDLE SCREEN	HOPPER WELDMENT	LEFT RETURN SCREEN	RIGHT RETURN SCREEN
		PART#	102004	110020	110049	110305	110423	110600	110673	110986	311691	311692	942161	970211	970366	975091	975099	975100
		Δ ΣΤΩ	9 tf	² 4	9	4 0	9 ,	14	16	Н	+	2 19	\vdash	-	+	4	-	-
		ITEM	-	α ₆₀	4	0 2	~	ထ တ	10	=	7 5	£ 4	15	16	17	0 0	20	21
	HOPPER ASSEMBLY																	

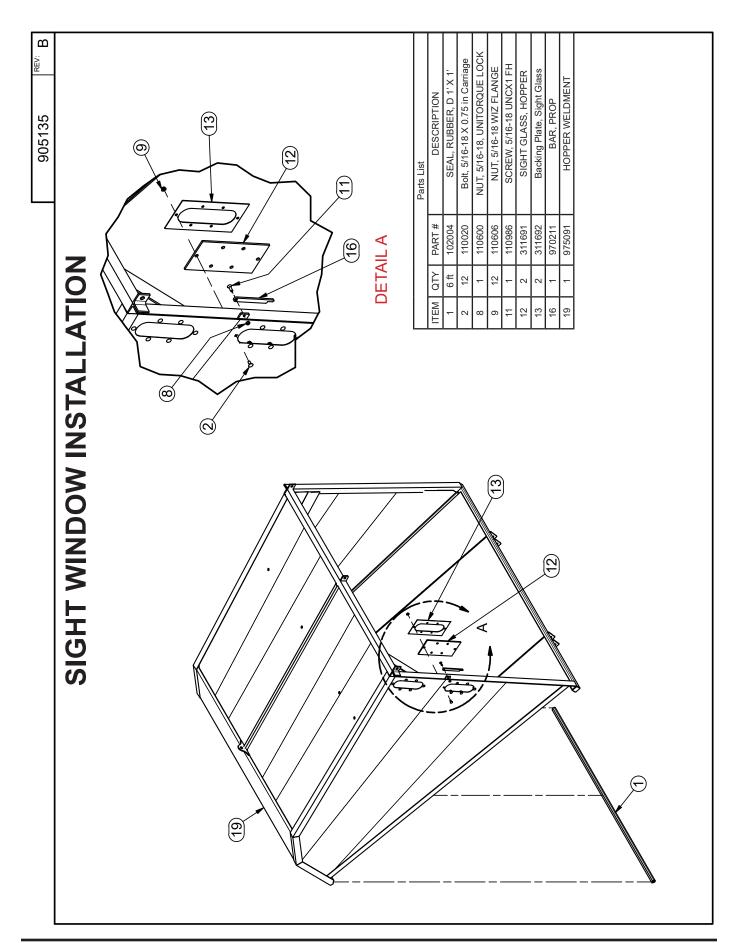



.	_	_	П	-	-		
903133 B	ratio List DESCRIPTION	DEBRIS FLAP-RETURN SCREEN	HOPPER WELDMENT	LEFT RETURN SCREEN	RIGHT RETURN SCREEN		
	PART#	970729	975091	975099	975100		
	QTY F	⊬	±	<u></u>	-		
	ITEM	_	19	20	21		
-	Ē	_		5	7		
1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	raits List DESCRIPTION	NUT, 5/16-18 WIZ FLANGE	WASHER, 1/4" FLAT STANDARD	SCREW, 1/4 X 1 TEK SELF-TAP	PIN, STABILIZER	MIDDLE SCREEN	EEN INSTALLATION
	PART #	110606	110673	710586	942161	920366	
	\vdash	╄	Н	16 7	9	1	
	YTØ ME		Н	\dashv		-	
Dorte List	DESCRIPTION	NDARD	DER	Pin, Lynch 7/16 x 1 3/4 14	75L	BOLT, 5/16-18 X 1.0 17	
	Y PART#	110038	\dashv	\dashv	\dashv	110423	
	A QTY	4	10	4	9	9	
1	TEM	3	4	2	9	~	

HOPPER INSTALLATION	INSTALLATION				
TTEM QTY PART# 1 3 110026 2 2 110038 4 1 110304 5 2 110334 6 2 110337 6 2 110337 6 2 110337 6 2 110337 6 2 110337 6 1 110610 1 1 110610 1 1 1 1 1 1 1 1 1					
ITEM OTV PART# 1 3 110026 2 2 11073 4 1 110208 4 1 110304 5 2 11033 4 1 110304 5 2 11033 4 1 110304 5 2 11033 6 2 11033 6 2 11033 6 2 11033 6 2 11033 6 2 11033 6 1 110610 1 110610 1 1 110610 1 1 110610 1 1 110610 1 1 110610 1 1 110610 1 1 110610 1 1 110610 1 1 110610 1 1 1 1 1 1 1 1 1					Parts List
1 3 110026 2 110179 3 1 110208 4 1 110304 5 2 110334 6 2 110337 8 1 110339 9 1 110610 10 110615 11 3 110639 11 3 110639 12 110610 13 110639 13 110639 14 3 111226 15 2 20480 17 3 315257 18 2 2 20480 17 3 315257 18 2 2 2 2 3 3 3 3 3 3		ITEM	ΔTY	PART#	
2 11079 1 110208 2 110334 2 110334 2 110335 1 110610 1 110615 3 110628 2 110639 2 110639 2 110650 3 111226 2 220480 3 315257 2 210326 2 220480 3 315257 2 510161 2 510174 1 905136 1 905136		-	က	110026	BOLT, 5/8-11 X 1.25
1 110208 2 110334 2 110334 2 110335 1 110610 1 110615 3 110628 2 110639 2 110658 2 110670 3 111226 2 220480 2 210326 2 210326 2 200480 3 315257 2 510161 2 510174 1 905136 1 905136		7	2	110179	BOLT, 7/16-14 X 2.75
1 110304 2 110334 2 110336 2 110337 1 110610 1 110615 3 110639 2 110639 2 110639 2 110670 3 111226 2 20480 2 210326 2 20480 3 315257 2 510174 1 905136 1 905136		3	-	110208	BOLT, 1-8 X 5.0
2 110334 2 110336 2 110379 1 110610 1 110615 3 110639 2 110639 2 110639 2 110639 2 210326 2 220480 3 315257 2 510161 2 510174 1 905135 1 906136 1 906148 2 970149 2 970149 2 970149 1 975056		4	-	110304	PIN, LOCK 3/8 X 2.5 SQ
2 110336 2 110337 1 110610 1 110615 3 110639 2 110639 2 110639 3 11226 2 220480 3 315257 2 210326 2 210326 2 210480 3 315257 2 510174 1 905136 1 905136 1 970150 2 970148 2 970150 2 970150		2	2	110334	BOLT, 1-8 X 6.0
2 110337 1 110379 1 110610 1 110615 3 110639 2 110658 2 110670 3 111226 2 220480 3 315257 2 510161 2 510161 2 970148 2 970148 2 970149 2 970149 2 970149 1 90536 1 975055		9	7	110336	WASHER, 1-1/4 FLAT MACHINE 10G
1 110379 1 110610 1 110615 3 110638 2 110658 2 110670 3 111226 2 220480 3 315257 2 510161 2 510174 1 905135 1 905135 1 905136 2 970148 2 970149 2 970149 1 975055 1 975055		_	2	110337	NUT, 7/16-14 WIZ FLANGE
1 110610 1 110615 3 110639 2 110658 2 110670 3 111226 2 220480 2 220480 3 315257 2 510161 2 510174 1 905136 1 970149		ω	-	110379	BOLT, 1/2-13 X 2.0
1 110615 3 110639 2 110658 2 110670 3 111226 2 220480 3 315257 2 510161 2 510174 1 905136 1 905136 1 905136 1 905136 1 905136 1 905136 1 970149 2 970149 2 970149 1 975055 1 975055		တ	-	110610	NUT, 1/2-13
3 110639 2 110658 2 110670 3 111226 2 220480 3 315257 2 510161 2 510174 1 905136 1 905136 1 905136 1 905136 1 905136 1 905136 1 970149 2 970149 2 970149 1 975055 1 975055		10	-	110615	NUT, 1/2-13, UNITORQUE LOCK
2 110658 2 110670 3 111226 2 220480 2 220480 3 315257 2 510174 1 905136 1 905136 1 905136 2 970148 2 970149 2 970149 1 975056 1 975056		7	က	110639	NUT, 5/8-11, UNITORQUE LOCK
2 110670 3 111226 2 210326 2 220480 3 315257 2 510174 1 905136 1 905136 1 905136 2 970148 2 970149 2 970150 1 975055		12	7	110658	WASHER, 1/2" FLAT STANDARD
3 111226 2 210326 2 220480 3 315257 2 510161 2 510174 1 905136 1 905136 1 905149 2 970149 2 970149 2 970150 1 975056 1 975056		13	2	110670	WASHER, 7/16" FLAT STANDARD
2 210326 2 220480 3 315257 2 510161 2 510174 1 905136 1 905136 2 970148 2 970149 2 970150 2 970151 1 975055 1 975057		14	က	111226	NUT, 1-8, UNITORQUE LOCK
2 220480 3 315257 2 510161 2 510174 1 905136 1 910044 2 970148 2 970149 2 970150 2 970151 1 975055		15	2	210326	CLIP, HAIRPIN
3 315257 2 510161 2 510174 1 905135 1 905136 2 970148 2 970149 2 970150 2 970150 1 975055 1 975056		16	2	220480	NIA
2 510161 2 510174 1 905135 1 905136 1 910044 2 970148 2 970149 2 970150 2 970151 1 975055 1 975057		17	က	315257	PIN WELDMENT, HOPPER DOOR
2 510174 1 906135 1 906136 1 910044 2 970148 2 970150 2 970151 1 975056 1 975057		18	2	510161	SetScrew, 3/8-16 X 0.5
1 905135 1 905136 1 910044 2 970148 2 970150 2 970150 1 975055 1 975056		19	2	510174	GREASE ZERK, 1/4-28 ST
1 906136 1 910044 2 970148 2 970149 2 970150 1 975055 1 975056		20	-	905135	ASSEMBLY, TV60RE HOPPER
1 910044 2 970148 2 970149 2 970150 2 970151 1 975055 1 975056		21	1	905136	ASSEMBLY, TV60 DOOR
2 970148 2 970149 2 970150 2 970151 1 975055 1 975056		22	_	910044	COVER, VINYL .25 X 1.5 X 4 GRIP
2 970149 2 970150 2 970151 1 975055 1 975056		23	2	970148	HOPPER DOOR LATCH
2 970150 2 970151 1 975055 1 975056 1 975056		24	2	970149	LATCH PIVOT BUSHING
2 970151 1 975055 1 975056 1 975056		25	2	970150	LATCH SPACER
1 975055 1 975056 1 975057		56	2	970151	LATCH PIVOT SPACER
1 975056 1 975057		27	-	975055	HANDLE WELDMENT, DUMP CYL LOC
1 975057		28	1	920226	SHAFT WELDMENT, DUMP CYL LOC
		29	_	975057	STOP WLDMNT, CYLINDER LOCK

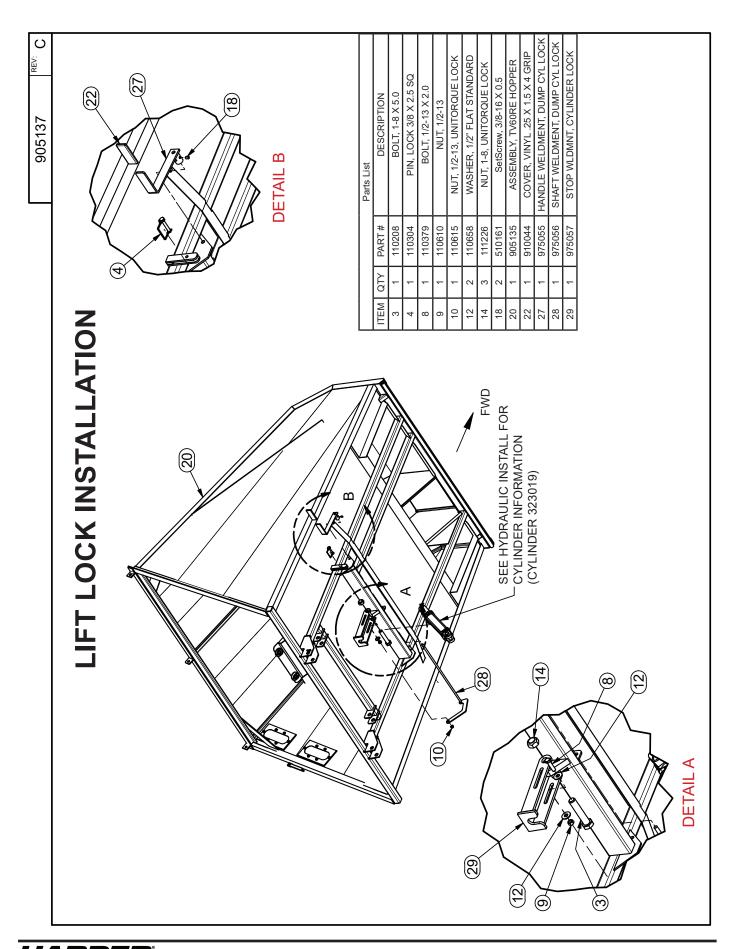

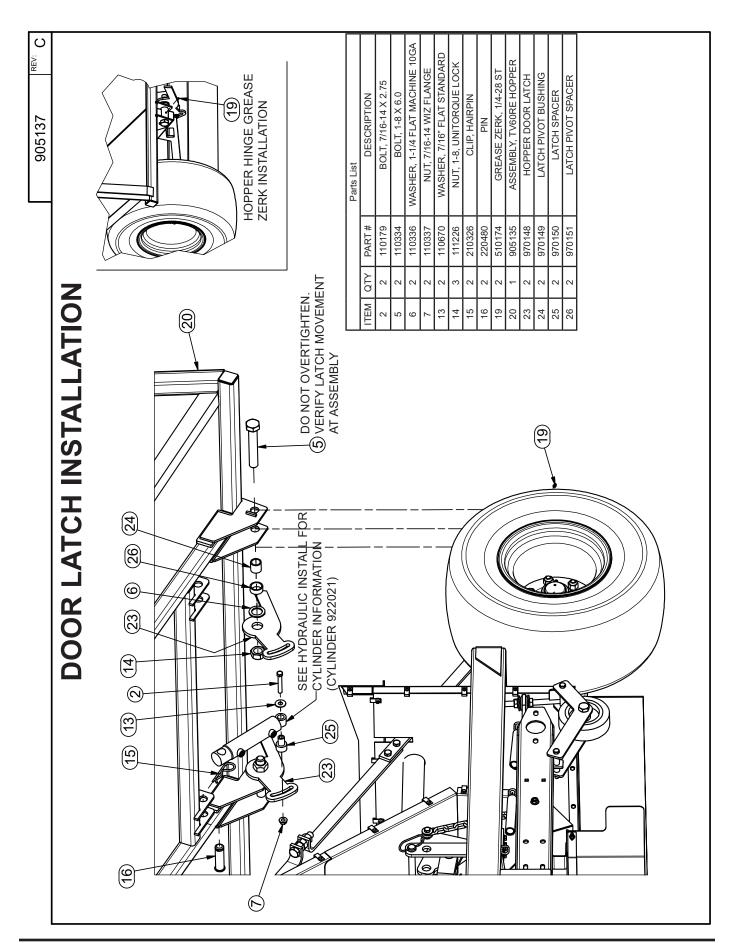


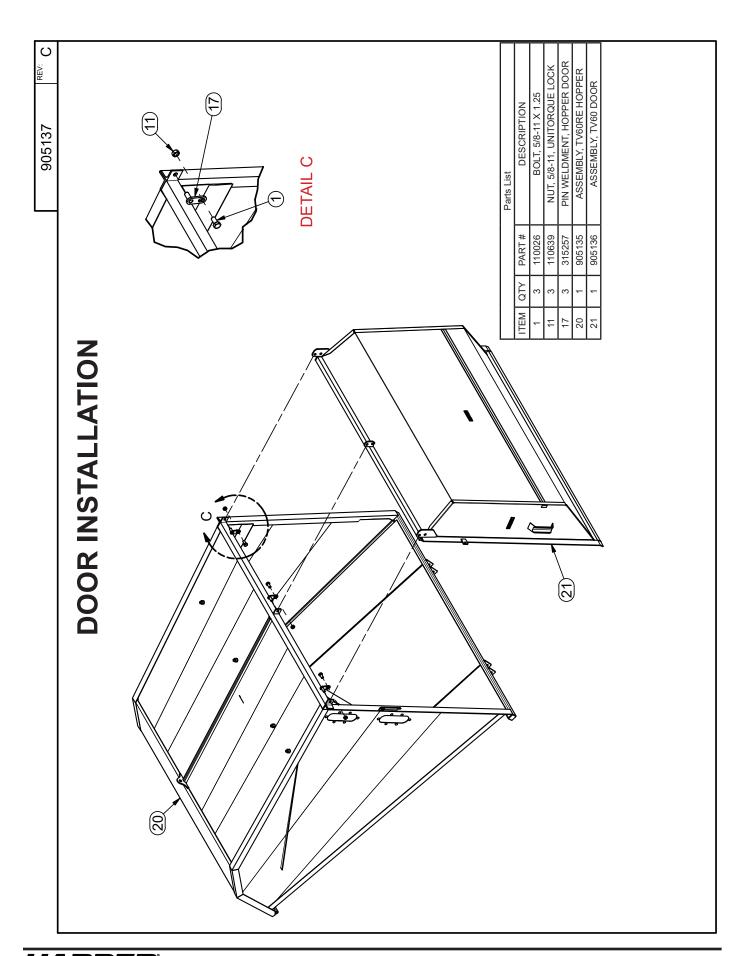

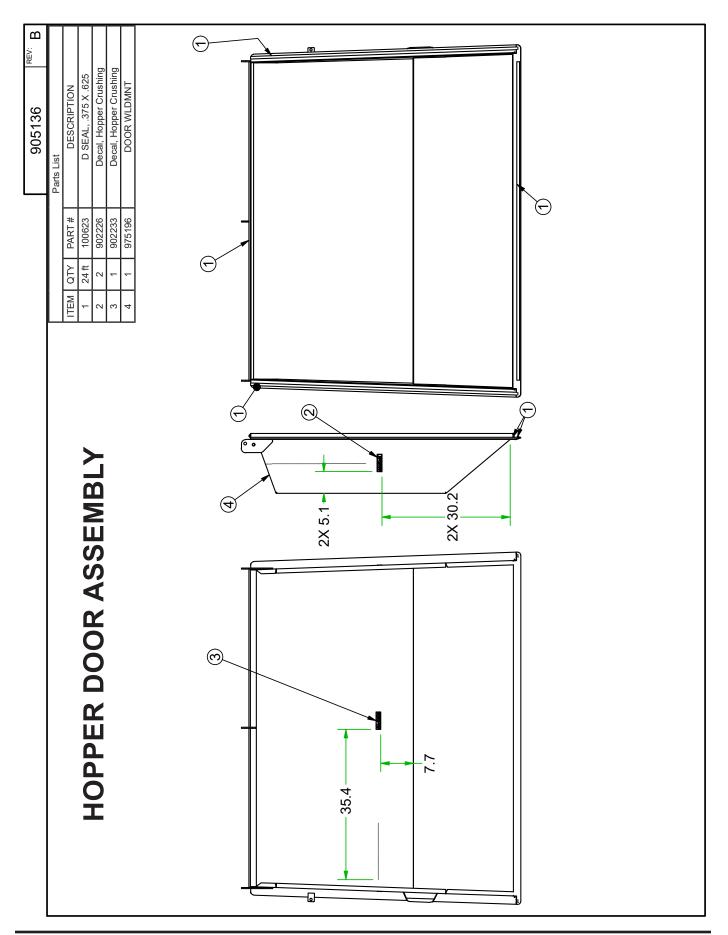



	Τ	Π				П		П		П				П		$\overline{}$													
Parts List	DESCRIPTION	CYLINDER - 2 X 8, SAE-6	PIPE PLUG, 1/2" SQ HEAD PLAIN	DOUBLE HOSE CLAMP	DOUBLE COVERPLATE	FILTER HEAD	FILTER, 10 MICRON	FITTING, NIPPLE 3/4 X 1.375	PUMP, .31cid X 1/2" HALDEX W600	HYDRAULIC CYLINDER	BREATHER/FILLER CAP	VALVE, 4 BANK, TV60 W/O NEEDLE	Cylinder, 2 X 6, -6 SAE Cross	Hose Kit, TV60RE	Pump Mount Spacer	Hydraulic Tank Assembly		(Da								A.		
	PART#	323019	500175	522104	522105	720041	720043	720077	920006	922021	923001	923006	923011	925010	970879	973004													
	QTY	-	-	2	2	_	_	_	1	2	_	_	_	_	_	_													
	ITEM	59	30	31	32	33	34	35	36	37	38	39	40	41	42	43													
Parts List	DESCRIPTION	ADAPTER, BULKHEAD, 6MJ-6MJ	ADAPTER, 10MJ-12MP	ADAPTER, 6MJ-6MB90	ADAPTER, 12BH-12MP	ADAPTER, 4MJ-4MB	ADAPTER, 4MJ-4MB90	ADAPTER, 6MJ-8MB	ADAPTER, 4MJ-4MJ-4MJ	ADAPTER, 8MJ-8MB	ADAPTER, 8MJ-8MB90	ADAPTER, 6MJ-6MB	ADAPTER, 8MJ-8FJX90	ADAPTER, 12MJ-10MB45	ADAPTER, 6MJ-6MB90 R.062				101H	INDIALLATION									14)
	PART#	120102	120138	120222	120227	120233	120235	120239	120241	120277	120288	120319	120368	120389	120551		Ī		- < <u>+</u>	M									
	QTY	3	-	3	1	2	2	2	2	-	-	9	_	-	_				0	2									
	ITEM	15	16	17	18	19	20	21	22	23	24	25	26	27	28		76/		_										
Parts List	DESCRIPTION	NUT, 5/16-18 U-TYPE .75L	BOLT, 5/16-18 X 1-1/2	BOLT, 5/16-18 X 4.0	BOLT, 5/16-18 X 0.75, WIZ FLANGE	BOLT, 1/4-20 X 1-1/2	NUT, 5/16-18 WIZ FLANGE	NUT, 5/16-18	WASHER, 5/16" FLAT STANDARD	WASHER, 1/4" LOCK	WASHER, 5/16" LOCK	Bolt, 5/16-18 X 1.5 in Carriage	CLAMP, 1.25", T-BOLT	Screw, 10-32 X 1/2, Hex Washer Hd, SS	ADAPTER, 10MJ-12MB90		925010 - Hose Assemblies Parts List	DESCRIPTION	Pump Suction	Deck Motor	Hopper Lift	Broom Arm to Motor	Door Latch	Deck Lift	Hopper Lower	Valve "T" to Filter	Door Latch	Pump Pressure	
	PART #	110319	110377	110441	110444	110474	110606	110608	110665	110667	110674	111164	112008	112056	120030		125010 - Hose	# L	003	36	338	141	152	133	134	135	136	137	
	ΔT	4	_	2	4	2	2	2	1	2	2	-	1	9	-		6	PART#	920003	922036	922038	922041	922052	922133	922134	922135	922136	922137	
	ITEM	-	2	3	4	2	9	7	8	6	10	7	12	13	14			ΔTΥ	-	2	-	2	4	2	1	1	2	1	




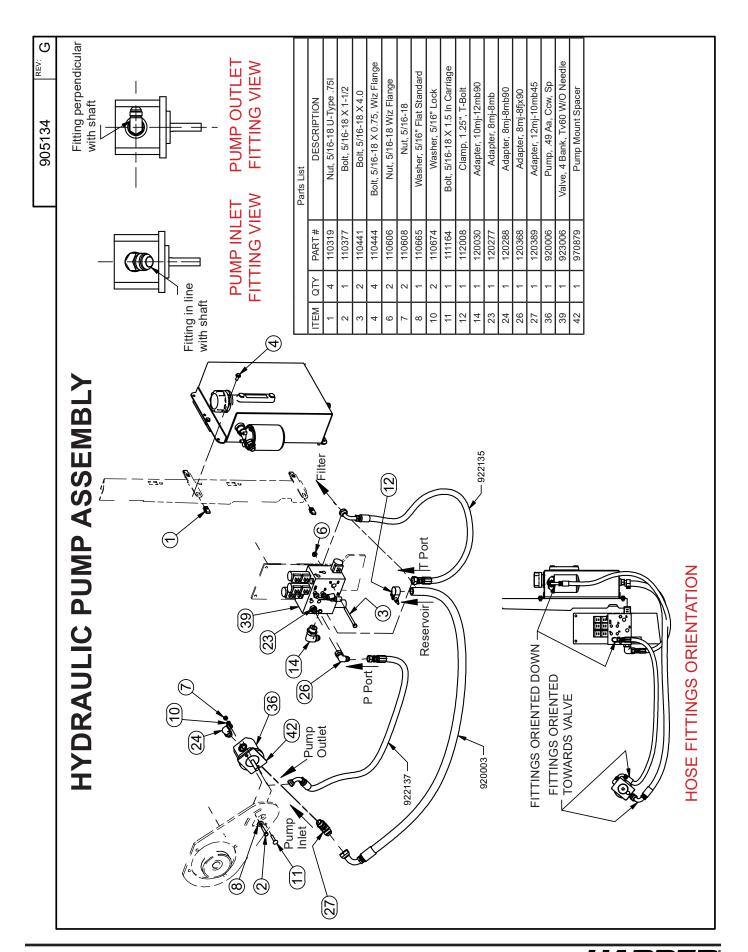



905134 REV: G		Parts List DESCRIPTION Screw, 10-32x1/2, Hex Washer Hd, Ss Adapter, 10mj-12mp Adapter, 12bh-12mp Adapter, 12bh-12mp Pipe Plug, 1/2" Sq Head Plain Filter Head Filter, 10 Micron Filter, 10 Micron Filter, 10 Micron Filter, 10 Micron Sight Glass, Hydraulic Tank Sight Glass, Hydraulic Tank	
	HYDRAULIC RESERVOIR	Apply teflon tape (33.1) (43	

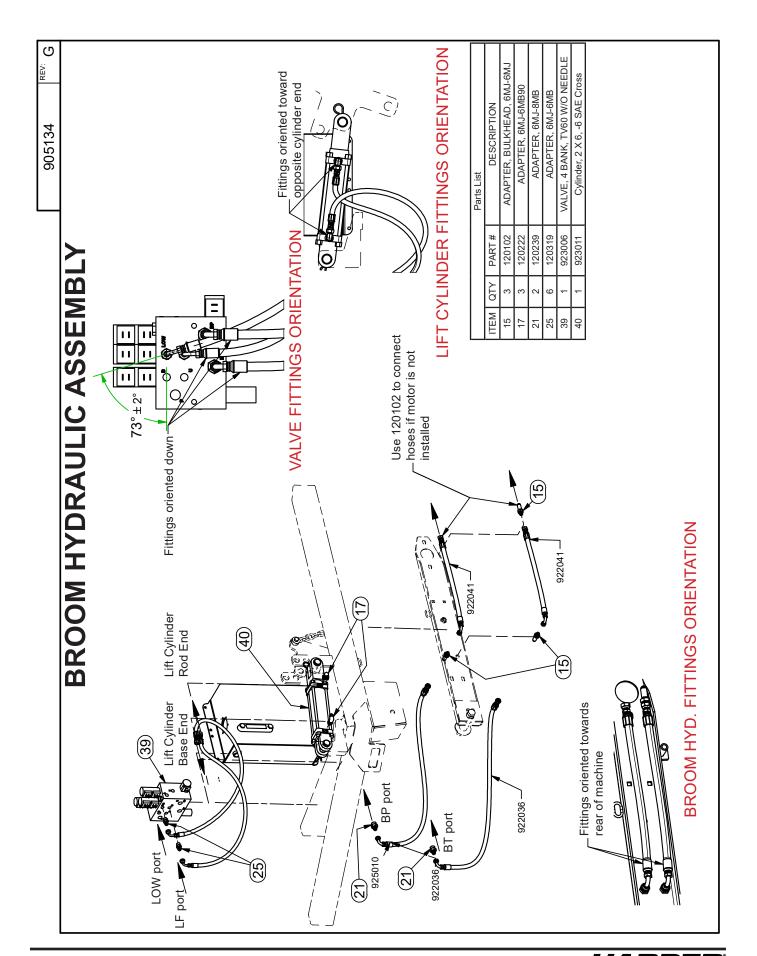

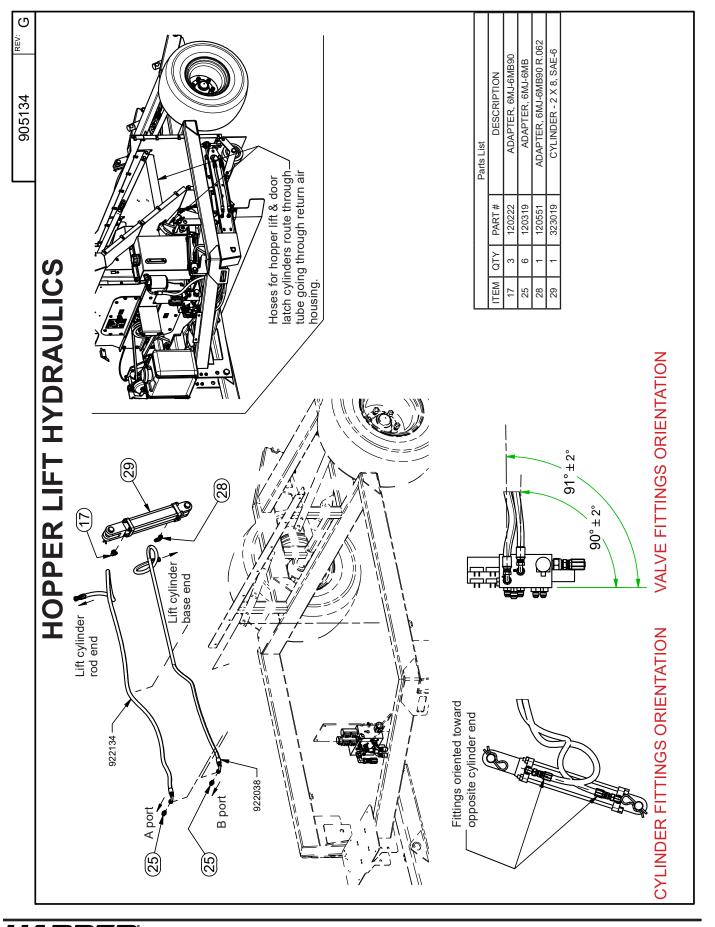

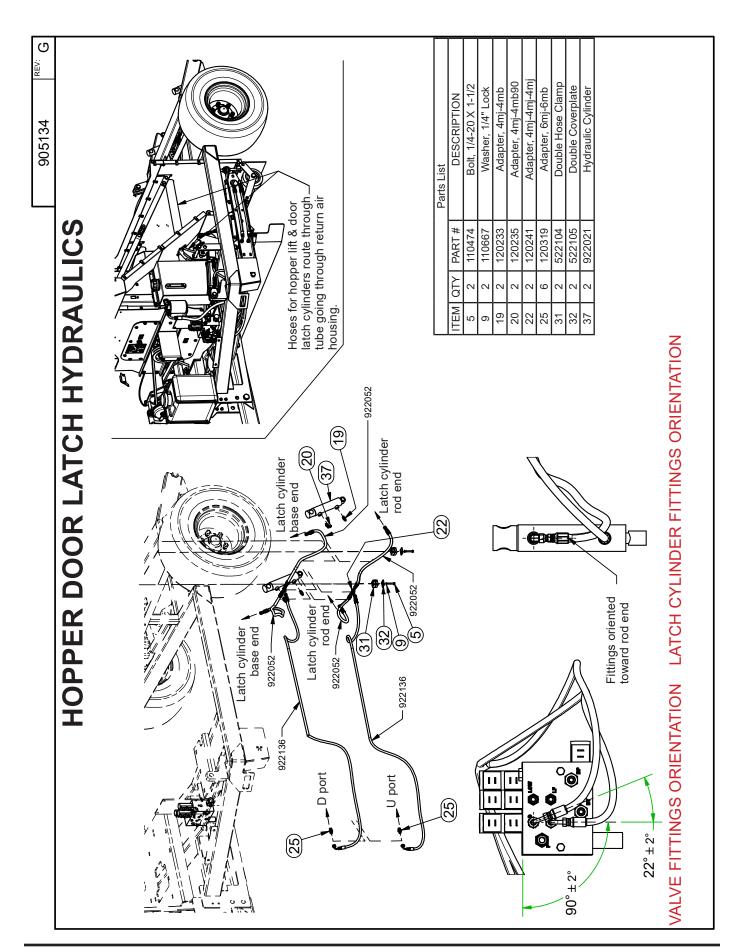

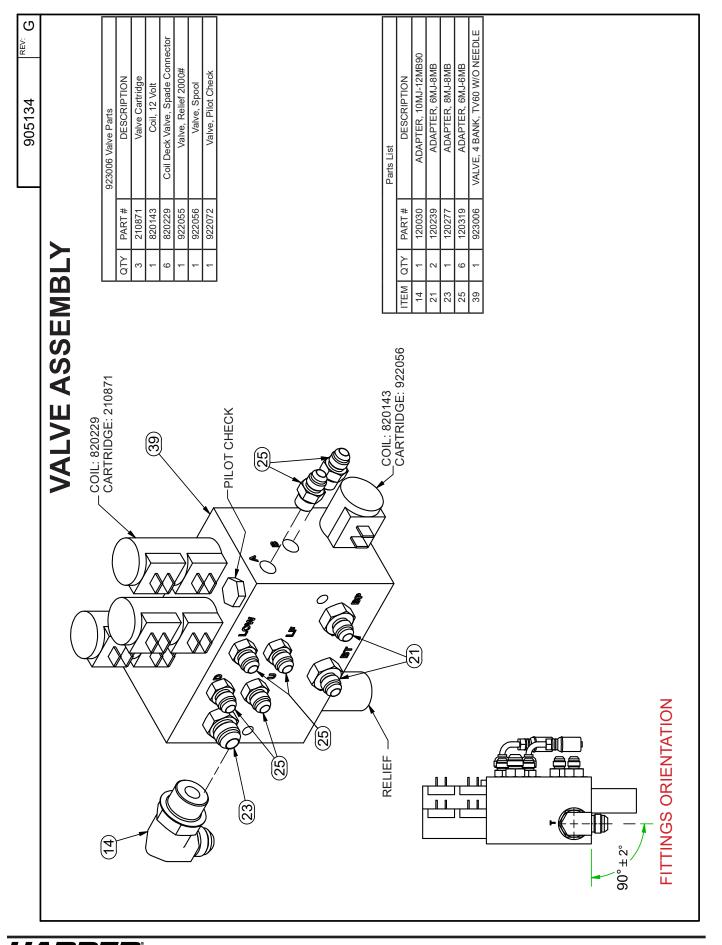

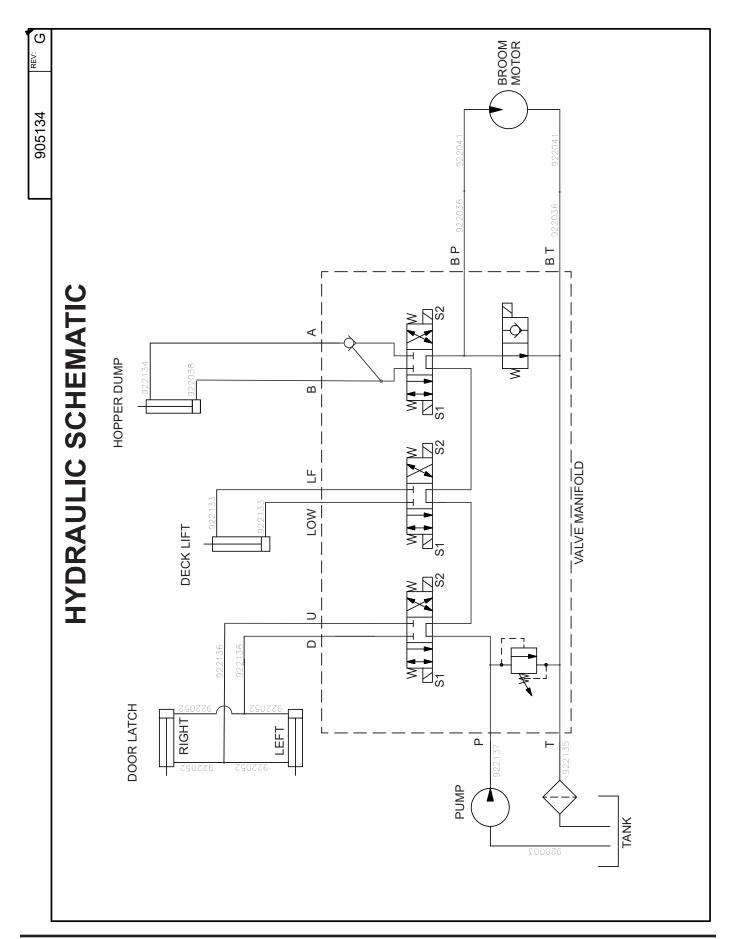


REV:		prido	D.			kss	e Below)	e Below)		.75	1.00		2		≯		WIII	Delow)	_									.		//							
905138		DESCRIPTION Dulley, 2 Groove Od Bushing	Bushing Sk 1 1/2	Idler Pulley Assy	Belt, Gates A33	Sheave, 1a4.5 X 1 1/8kss	Belt, Powerband 2/B76 (See Below)	Engine, Kohler, Efi (See Below)	Primer Bulb, Carb	Spacer, .75 X .50 X 2.75	Spacer, 1.625 X 1.13 X 1.00	Spacer	Belt Guard, Bracket R	Clutch Bracket	Plate, Pump Mount AA	Mount - Iac, Konier	at, battery Hold Do	Tane, Engline Mount (See Below)													1092)	22A15 & earlier	22A36 & 22A99	23AUO & 23A33 24A11 & 24A38	(6	22A16-22A35 23A01-23A05	
	Parts List		-			She	Belt, Po	Enç		dS							10 000	riale, r						1							943054 - 23.5 HP (PA-ECH730-3092)	22	22	2 2	CH749-305	22A16-22A 23A01-23A	1
		PART #	942067	942167	942187	942188			952030	970284	970509	970529	970548	970680	970785	370070	9/00/6	075447	211078					/			-y				3.5 HP (F				:6.5 HP (E		L/ C: L (:
		Z TØ T	- -	-	-	-	-	1	1	2	-	7	_	-	- -	- -	- -	- -	-						"),		,			(57) Kohler:	3054 - 2				3061 - 2		000
L	\downarrow	ITEM	22	23	24		*56	*57	28	29	09	61	62	63	64 7	00	000	200	S	_	_	_	_	_	\\\/ 1		/,			(57) Ko	943				nt) 943		•
	Parts List	DESCRIPTION Screw, 10.24 × 0.75 Phms	Nut Whiz 10-24nc Zp	Bolt, 3/8-16 X 2.0 Fhcs 82°	Bolt, 5/16-18 X 9.5 Zinc Full Thread	Washer, 7/16 Nord Lock	Insulator Cap, (Alternator)	Battery Terminal Cover, Positive	Battery Terminal Cover, Negative	Clamp, Adel Ac10 .265 Hole	Key, 3/8 X 3/8 X 2.25	Key, 1/4 X 1/4 X 1.0 Under	Cable, Battery To Ground	Battery, Sealed Gel W/ L Terminal	Spacer, 1.75x1.25x.313	Fuel Tank Assy, o Gal	Sulap, Hold Dowll	650cc Carbon Callister 050cc	OSOCC CAIDOII CAIIIStel Blacket	Harness Engine/Remote Tv60e	Cable Battery 4da 96" W/Rind	Tach/Hour Meter: Kohler	Bushing, Taperlock 1610 531 Bore	Sheave, 1a5.6/B6.0 -1610 TI				ENGINE	NOITA I IATZNI				Belt, Powerband: 943341 - 25451+ (2/876)	942283 - 23A01-25A50 (2/B75)	(74" belts originally used and were too tight) 943061 - 26.5 HP (ECH749-3059)		
		110700	111046	111067	111198	111272	132014	132069	132070	200019	411120	510228	530051	832011	900278	902102	902103	902230	902237	932061	932062	932070	940127	942027					Z			(26)	Belt, F	94231	(74"	(67)	i
		ΔŢ	1 ~	4	2	-	-	_	1	1	-	_	_	_		- c	ν τ	- (۷ ۲		-	-	_	-													
		ITEM	28	29	30	31	32	33	34	35	36	37	38	39	40	4 C	42	5 2	45	46	47	48	49	20													
:	Parts List	DESCRIPTION Clamp Hose #1 25 Mini	Hose 1/4" Low Perm	Hose, 3/16" Low Perm	Bolt, 7/16-14 X 4.5	Bolt, 5/16-18 X 2.0 Shcs	Bolt, 7/16-14 X 1.25, Wiz Flange	Nut, 1/4-20 Wiz Flange	Nut, 5/16-18 U-Type .75I	Nut, 7/16-14 Wiz Flange	Bolt, 3/8-16 x 1.25 in Carriage	Bolt, 5/16-18 X 1.0	Bolt, 1/2-13 X 1.5	Bolt, 3/8-16 X .75	Bolt, 7/16-20 X 2.75	BOIL, 1/4-20 A 0.73, WIZ Flaffge	BOIL, 1/10-14 X 1.23	Ni. + E/46 10 Wiz Elosso	Nut, 3/10-18 WIZ Flarige Nut 5/16-18	Nut 5/8-11 Unifordine Lock	Nut. 3/8-16 Wiz Flange	Washer 1/2" Flat Standard	Washer, 5/16" Flat Standard	Washer, 1/2" Lock	Washer, 7/16" Lock	Washer, 5/16" Lock											
		100361	100644	100708	110012	110168	110254	110290	110319	110337	110402	110423	110429	110433	110443	440520	11055	110002	110608	110639	110645	110658	110665	110666	110671	110674											
		= -	. 62	20.	2	2	2	2	2	2	4	2	7	- -	-	0 0	1	- -	† C	1	- 6:	-	2	2	2	4											
		ITEM	- ~	(က	4	2	9	7	8	6	10	=	15	2	4 7	<u>د</u> ر	2 5	= 0	0 6	2 5	2 2	22	23	24	22	26											



905138 REV: L	Parts List	DESCRIPTION	Belt, Gates A33	Sheave, 1a4.5 X 1 1/8kss	Belt, Powerband 2/B76 (See Below)	Engine, Kohler, Efi (See Below)	Spacer, .75 X .50 X 2.75	Spacer, 1.625 X 1.13 X 1.00	Spacer	Belt Guard, Bracket R	Clutch Bracket	Plate, Pump Mount AA	Tensioner Weldment				ENGINE ASSEMBLY					Kohler: 943054 - 23.5 HP (PA-ECH730-3092)	22A15 & earlier	22A36 & 22A99 23A06 & 23A99	24A11 & 24A38	943061 - 26.5 HP (ECH749-3059) 22416-22435	23A01-23A05	943062 - 26.5 HP (ECH749-3138) CARB	24A01 & 24A10 24A39+	100012	BELT TENSION INSTRUCTION	CHITCH: Belt (56) should deflect	1/2" at midpoint when 7lb is applied	DIMD: Bolt (64) should defect 1/1"	at midpoint when 7lb is applied
		PART#	942187	942188			970284	970509	970529	970548	970680	970785	975117				N (5)				(57)	Kohler: 943054 - 23				13061 - 26		13062 - 26			i L	: E	1/2" a		
	ĺ	QTY	1	1	1	1	2	_	2	1	1	_	_				Ž				9)	ჯ გ	•		•	გ		6			Œ	1			too tigh
		ITEM	54	22	_* 26	*57	29	09	61	62	63	64	89				ш																	75)	y were
	Parts List	DESCRIPTION	Key, 3/8 X 3/8 X 2.25	Key, 1/4 X 1/4 X 1.0 Under	Spacer, 1.75x1.25x.313	Clutch, Electric	Bushing, Taperlock 1610 .531 Bore	Sheave, 1a5.6/B6.0 -1610 TI	Pulley, 2 Groove Qd Bushing	Bushing, Sk 1 1/2	Idler Pulley Assy										(O.)		,				3	(pep	3 3 3	* (56)	Belt, Powerband:	942311 - 25A51+ (2/B76) 942283 - 23A01-25A50 (2/B75)	(74" belts originally used and were too tight)
	Ì	PART #	411120	510228	900278	932065	940127	942027	942063	942067	942167					The state of the s						16	8		(2) \	(A			(52)	Included	((50	1	89	
	ĺ	QTY	1	1	1	1	1	_	1	1	_					1	9)	C				(2 5	7					ر الدو				*	>	22
		ITEM	36	37	40	45	49	20	51	25	53						_		75	9	20	P	, (6	(4) (4)			36)		18	•					Z 24)
	Parts List	DESCRIPTION	Bolt, 7/16-14 X 4.5	Bolt, 5/16-18 X 2.0 Shcs	Bolt, 7/16-14 X 1.25, Wiz Flange	Nut, 5/16-18 U-Type .75I	Nut, 7/16-14 Wiz Flange	Bolt, 1/2-13 X 1.5	Bolt, 7/16-20 X 2.75	Bolt, 7/16-14 X 1.25	Bolt, 5/8-11 X 4.5	Nut, 5/16-18 Wiz Flange	Nut, 5/8-11, Unitorque Lock	Washer, 1/2" Flat Standard	Washer, 1/2" Lock	Washer, //16 Lock		((4) (25)	62 (6) (2)					18	E	30 (45) 30	(A)	23	con bolt (61)	ads. (17)	(24)	(19) propose but (59) viling reliai	had slight changes to size 2025.	If necessary, replace all at once.
	ŀ	PART #	110012	110168	110254	110319	110337	110429	110443	110539	110562	110606	110639	110658	110666	1106/1							(α	9) '	\odot			`	(14)	Use blue threadlock on bolt	and crankshaft threads.	11-00	(E2)	changes	ary, replac
	- 4	1 QTY	2	2	2	2	2	2	1	2	-	4	-	-	2	Ω ₹	-) blue	l crank	dne ro	7	s pully I slight	ecess
		ITEM	4	2	9	8	6	12	14	16	17	18	20	22	24	22	5						_							Use	anc	5	7	hac	ΙĘυ


ELECTRIC CLUTCH REPLACEMENT

ALL SERIAL NUMBERS

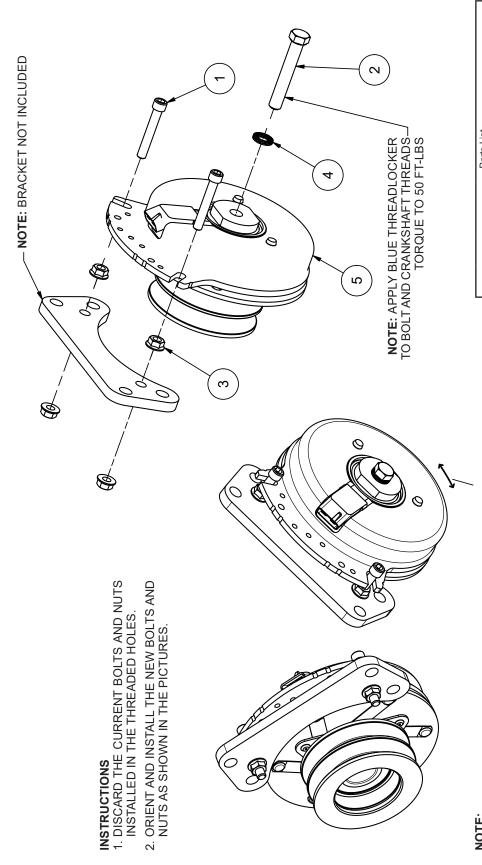

AFTER INSTALLATION IS COMPLETE, ENSURE THAT THE CLUTCH HOUSING CAN SLIGHTLY ROTATE FREELY ABOUT IT'S CENTER AXIS (MOVE BACK & FORTH). THIS WILL PREVENT THE CLUTCH FROM BINDING.

Parts List	DESCRIPTION	BOLT, 5/16-18 X 2.0 SHCS	BOLT, 7/16-20 X 2.75	NUT, 5/16-18 WIZ FLANGE	WASHER, 7/16, NORD LOCK	CLUTCH, ELECTRIC
	PART#	110168	110443	110606	111272	932018
	QTY	2	1	4	1	_
	ITEM QTY	1	2	3	4	2

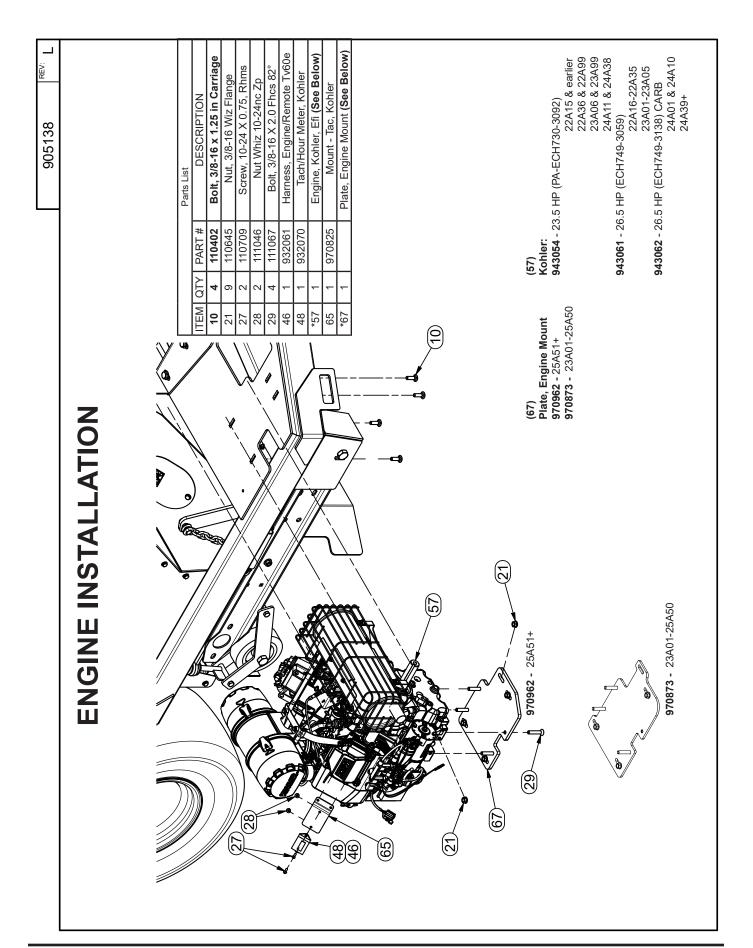


905138 REV: L	Parts List	DESCRIPTION	Nut, 5/16-18	Nut, 3/8-16 Wiz Flange	Washer, 5/16" Flat Standard	Washer, 5/16" Lock	Bolt, 5/16-18 X 9.5 Zinc Full Thread	Battery Terminal Cover, Positive	Battery Terminal Cover, Negative	Clamp, Adel Ac10 .265 Hole	Cable, Battery To Ground	Battery, Sealed Gel W/ L Terminal	Fuel Tank Assy, 6 Gal	Strap, Hold Down	Carbon Canister 650cc	650cc Carbon Canister Bracket	Cable, battery, 4ga 90 W/King	Engine, Kohler, Eti (See Below)	FIIITIEL DUID, CAID	Brkt, Battery Hold Down	ENGINE FUEL EMISSIONS & ELECTRICAL INSTALLATION 943054 - 23.5 HP (PA-ECH730-3092) 2245 & earlier 22436 & 22499 22436 & 22499 22436 & 22499 22436 & 22499 22436 & 22499 22436 & 22499 2245 & earlier 2246 & 23499 23401 - 26.5 HP (ECH749-3138) CARB 24401 & 24410 24439+
		PART#	110608	110645	110665	1106/4	111198	132069	132070	200019	530051	832011	902162	902163	902256	902220	332002	0000	922030	970876	ENICE ELE INSTITUTE STATE STAT
		I QTY	7	၈	2	4 (. 7	-	-	-	-	-	-	7	-	.7	- -	- -	-	_	(57) Koh 943
		ITEM	19	7	23	8 8	05 5	33	34	32	38	33	4	45	43	4 1	} [2	ဂိ	99	
	Parts List	DESCRIPTION	Clamp, Hose #4 .25 Mini	Hose, 1/4" Low Perm	Hose, 3/16" Low Perm	Nut, 1/4-20 Wiz Flange	Bolt, 5/16-18 X 1.0	Bolt, 3/8-16 X.75	Bolt, 1/4-20 X 0.75, Wiz Flange			clamps to route			(30)			9		<u>/</u>	
		PART#	100361	100644	100708	110290	110423	110433	110468			3 50" (17)		(2)		\ - -	(15)	$\frac{35}{35}$		*	
		QTY	_	79"	20	م ا	. 7	-	2			(C)	vap	purge port	Y				X		
		ITEM	-	7	ကျ	- ;	=	73	15		•	1	//To evap	bnrg							
		Use hose clamps except				($(2)^{20}$		(43)					(15)		(45)				(41)	58 To fuel filter

943062 - Kohler 26.5 HP EFI CARB

24A01 & 24A10 24A39+

22A16-22A35 **943061** - Kohler 26.5 HP EFI

23A01-23A05



ECH749-3059

ECH749-3138

PA-ECH730-3092

Service Parts	DESCRIPTION	Air Filter Element	Solenoid Kit	Solenoid	Tach/Hour Meter, Kohler	Ignition Switch	Exhaust Deflector	Muffler Guard Assembly	Muffler Kit	Fuel Filter
	PART#	840027	932008	932019	932070	932079	942068	942271	942298	942301

Tach/Hour Meter, Kohler

932070

932079 942068

Solenoid

Ignition Switch

Air Filter Element DESCRIPTION

Service Parts

Solenoid Kit

932008 932019

PART # 840027

Muffler Guard Assembly Exhaust Deflector

Muffler Kit Fuel Filter

942298

942271

942301

Tach/Hour Meter, Kohler

Solenoid

Air Filter Element DESCRIPTION

Service Parts

Solenoid Kit

932008 932019 932070 932079

PART#

840027

Muffler Guard Assembly

Muffler Kit

942298

942271

942301


Fuel Filter

Exhaust Deflector


942068


Ignition Switch


22A36 & 22A99 23A06 & 23A99 24A11 & 24A38 22A15 & earlier **943054** - Kohler 23.5 HP EFI




Part M QTY PART# 4 110119 NU	3 2 110319 NUT, 5/16-18 U-TYPE.75L 4 4 110444 BOLT, 5/16-18 X 0.75, WIZ FLANGE 5 2 110606 NUT, 5/16-18 WIZ FLANGE 6 1 110815 SCREW, 1/4-20x3/4 PHILLIPS PAN HEAD 7 1 110967 GROMMET, RUBBER 7/16 ID X 3/4 OD 8 1 130012 CLAMP, ADEL AC28 .265 HOLE 9 5 132035 SWITCH BOOT 10 7 132110 Flyback Diode Assembly 11 2 230038 TERMINAL, MALE PUSH ON, 16-14ga 12 4 510960 SCREW, 10-24 X 0.5, RHMS 13 2 530007 TOGGLE SWITCH	14 3 530020 SWITCH, SPDT-MOMENTARY 15 2 530111 RELAY 16 1 532059 LIGHT, INDICATOR, LED 17 1 902089 DECAL, SWITCHES TV60R E 18 1 902161 DECAL, TV 60 WIRING SCHEMATIC 19 1 932058 Harness, Reciever TV60 20 1 935025 TRANSMITTER/RECEIVER, Kar-Tech 21 1 975116 SHIELD - VALVE, WELDMENT 21 1 97516 SHIELD - VALVE, WELDMENT QTY PART # DESCRIPTION 7 132110 Flyback Diode Assembly	1 333006 Tra 1 905070 B 1 932058 Har 1 970288 OTY PART# 1 332075 1 935029 1 935029 1 902249	lew OLD STYLE 933003 Kar-Tech Transmitter / Receiver note QTY PART # DESCRIPTION a NOT 1 932056 Receiver remote 1 233004 Transmitter remote 1 902158 Decal
NSTALLATION	COLORED WIRE SILVER LINE ON DIODE	WIRE WIRE	-3X SILVER LINE 3X SILVER LINE USB Charge Cable: 232245 SN: 25A49+ come standard with the 2.4GHz remote systems.	NOTE: New style remote style remote items are NOT compatible with Old style remote up to 6' is acceptable.
ELECTRONICS INS			HYDRAULIC TO CONTROL VALVE DETAIL A DETAIL A DETAIL A	INSTALLATION OO SILVER INE

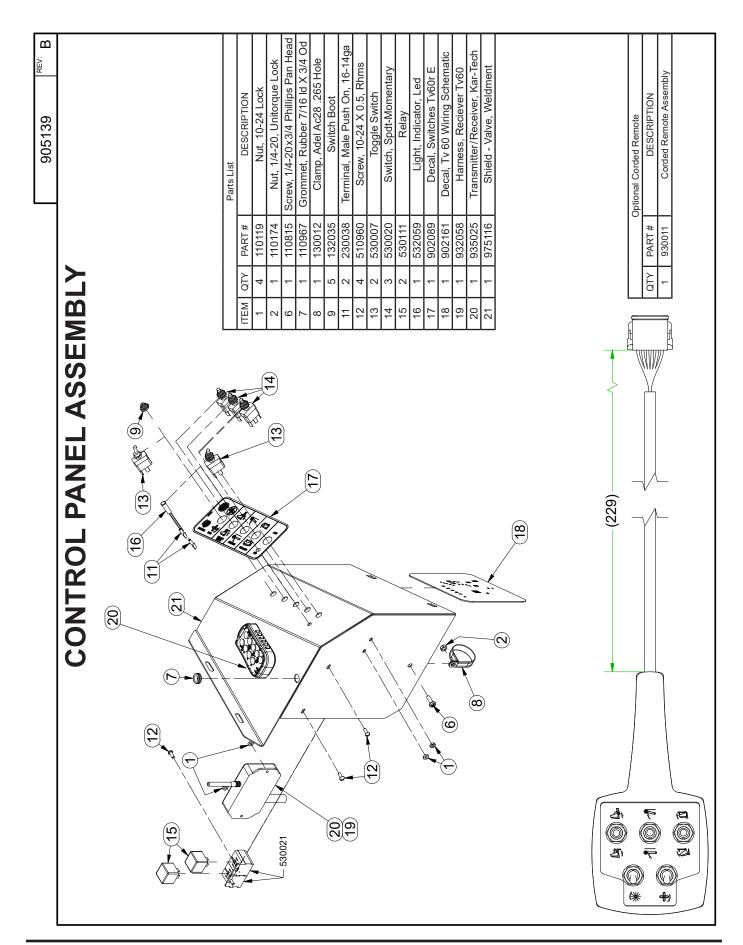


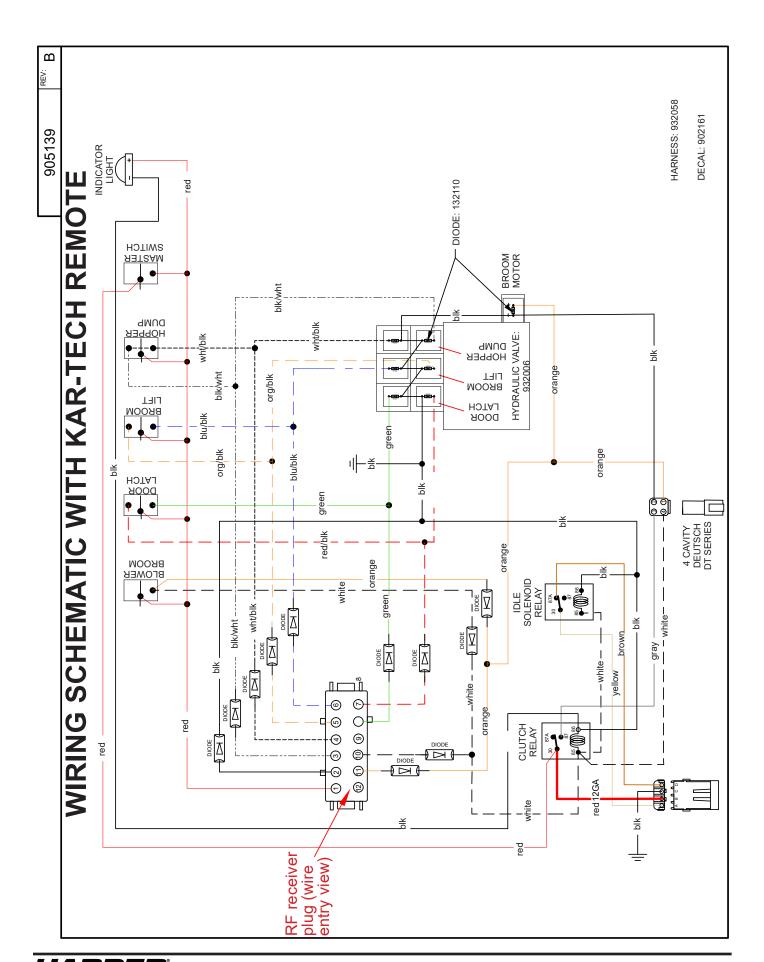

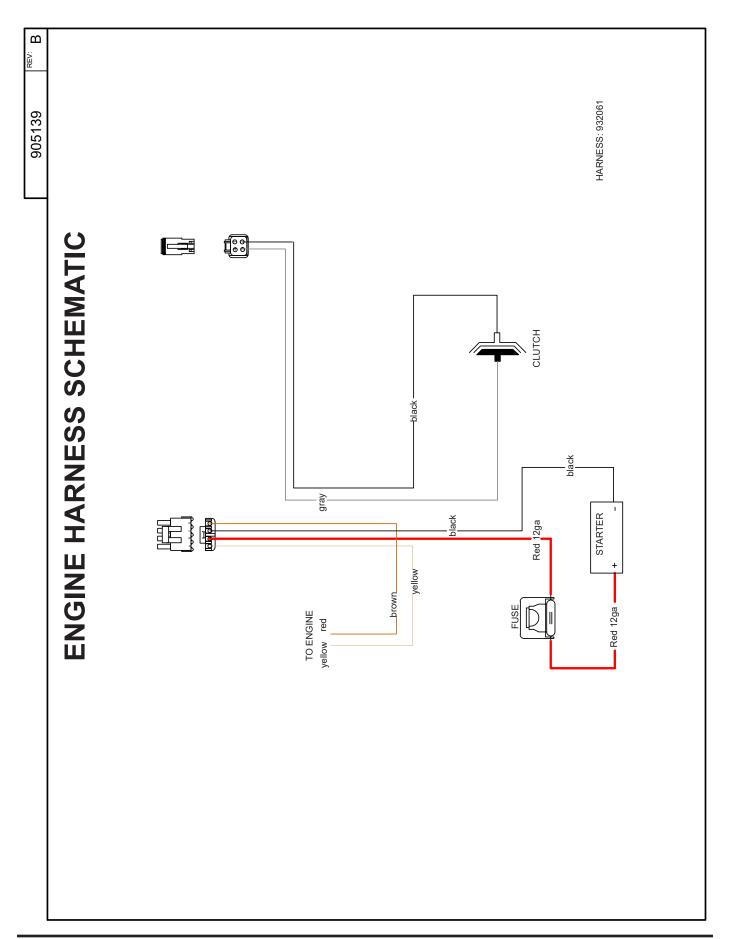


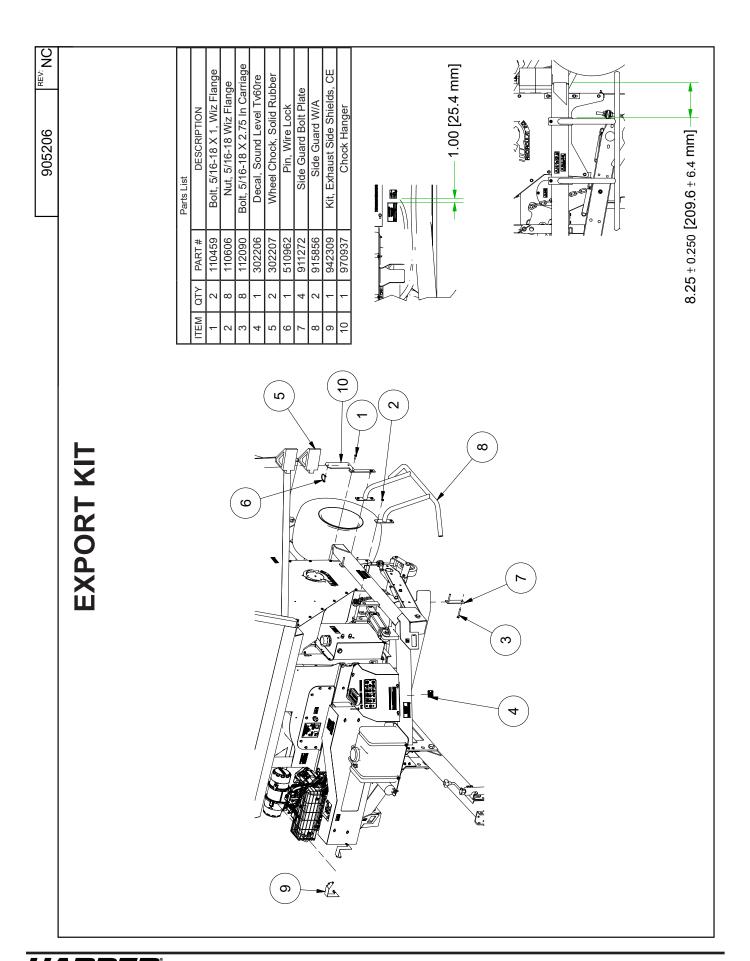


905140 REV: E		Parts List	DESCRIPTION	Nut, 1/4-20 Wiz Flange	Bolt, 5/16-18 X 0.75, Wiz Flange	Bolt, 1/4-20 X 0.75, Wiz Flange	Holder, Manual Decal, Prop 65, Short Form	Decal, Recycle Battery	Decal, Tie Down Point	Document, Carb Warranty	Decal, Turbo Vac, Turf Sweeper	Decal, Stripe Left Tv60r	Decal, Stripe Right I vour	Decal, Recirculating Decal. Read Operators Manual.	Decal, Harper 2.87 X 24.00, Black	Decal, Iso 46 Hydraulic Oil	Decal, Entanglement	Decal, High Pressure Injection	Decal, No Lift	Decal, Safe Distance, No Slope	Decal, Hopper Safety Lock	Decal, Overhead Clearance	Decal, Emissions Compliance, Carb	Decal, California Spark Arrester	Assy, Belt Shield W/Decals
			PART#	110290	110444	110468	152005	800195	802067	901001	902084	902102	902103	902104	902195	902204	902227	902232	902234	902235	902245	902247	902248	902259	905193
			A QTY	-	17	8		_	4	-	2	+	+	7 -	╀	┞	2	_	1	1	2	_	-	_	
			ITEM	_	7	က	4 ص	9	7	80	တ	7 9	= -	12 12	4	15	16	17	18	19	20	21	22	23	24
	FINAL INSTALLATION																			, 		7			

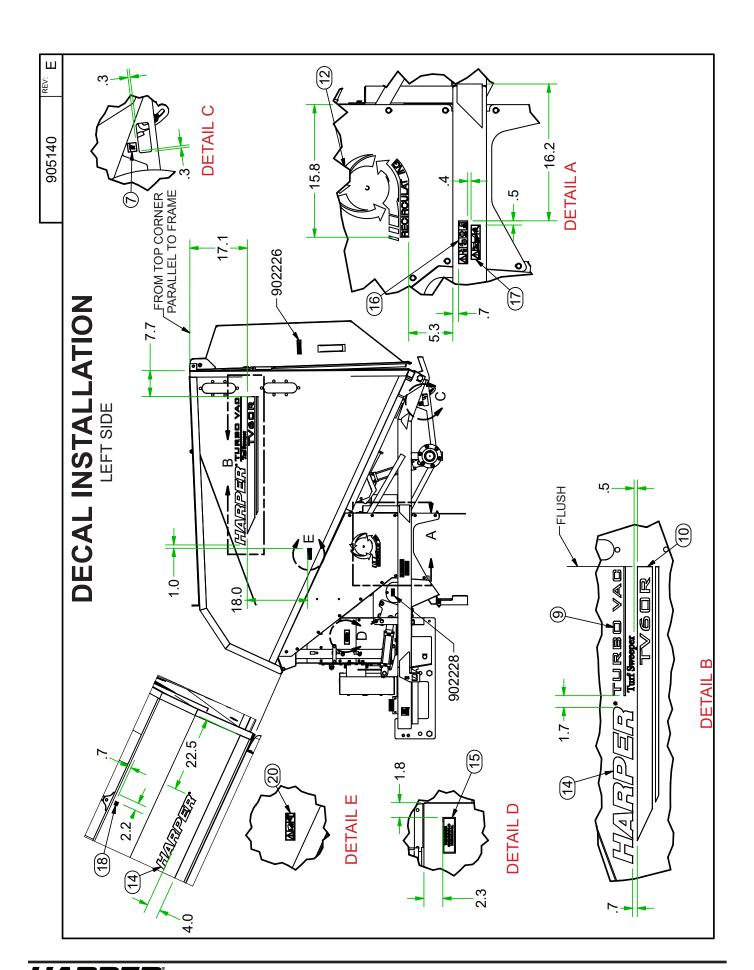




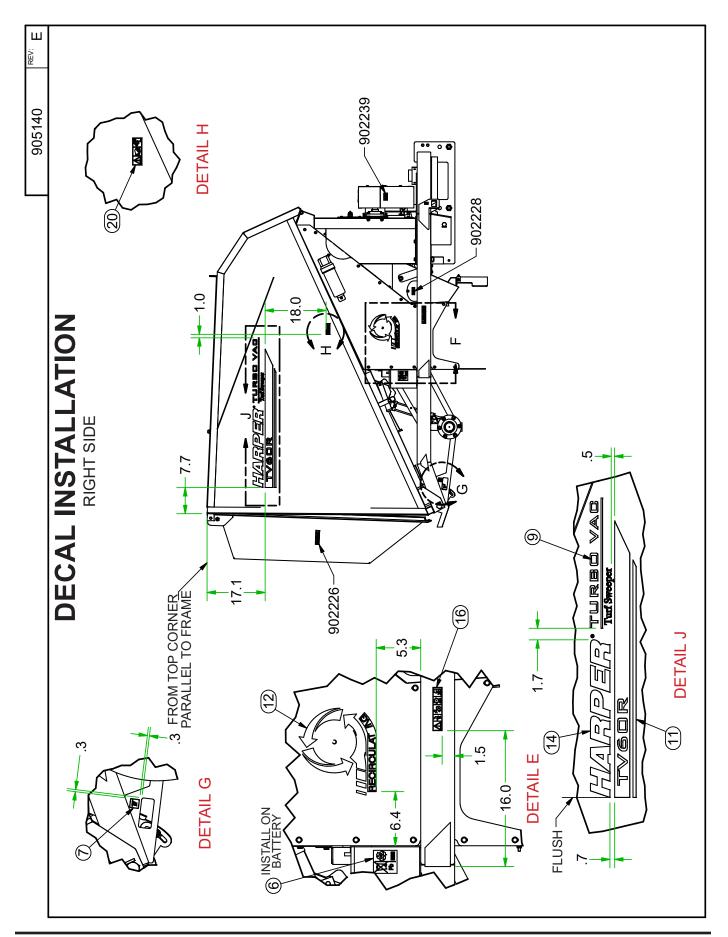


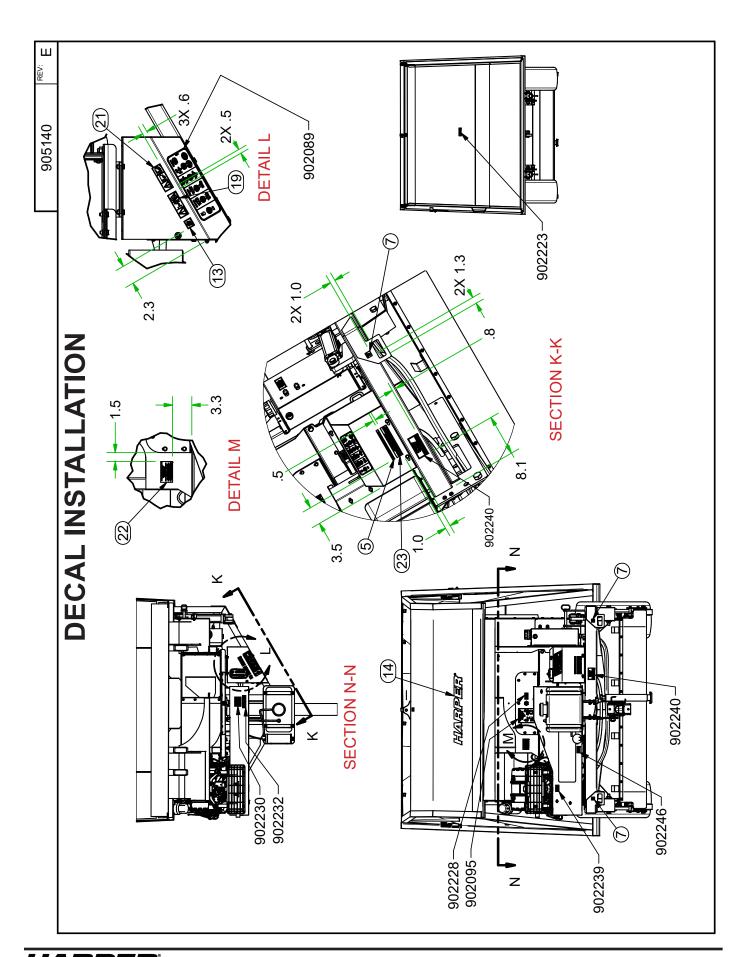

900231 Kev: D	Parts List	DESCRIPTION	COUPLER, CLAMP, 1" SHAFT	MOUNT - MOTOR PLATE	BROOM MOTOR SPACER	GUARD - MOTOR, DECK, TV60	SUPPORT - TORQUE ARM	ROTARY BRUSH ASSEMBLY, TV-60R	
		PART #	942190	970147	970230	970828	970830	975049	
		QTY	-	-	7	-	1	-	
		ITEM	73	4	15	16	17	18	
	Parts List	DESCRIPTION	WASHER, 7/16" FLAT STANDARD	WASHER, 7/16" LOCK	Bolt, 3/8-16 X 0.75 in Carriage	ADAPTER, 6MJ-10MB	MOTOR, EATON 101-1010	BEARING, 1" 2 BOLT FLANGE	BROOM KIT KIT: 900231 (15) (16) (16) (17)
	Ì	PART#	110670	110671	110894	120144	922004	942080	S €
	Ì	QTY	9	4	9	2	1	_	
	ĺ	ITEM	_	∞	6	10	11	12	
	Parts List	DESCRIPTION	MOULDING, EDGE	GROMMET, RUBBER .875 OD X .625 ID	BOLT, 3/8-16 X .75 FLT HD SKT HD	BOLT, 7/16-14 X 1.75 GR 5 HEX HEAD	NUT, 7/16-14	NUT, 3/8-16 WIZ FLANGE	
		PART#	100365	102005	110126	110321	110641	110645	88
	ŀ	QTY	-	2	4	4	4	9	
	ŀ	ITEM	-	2	လ	4	5	9	

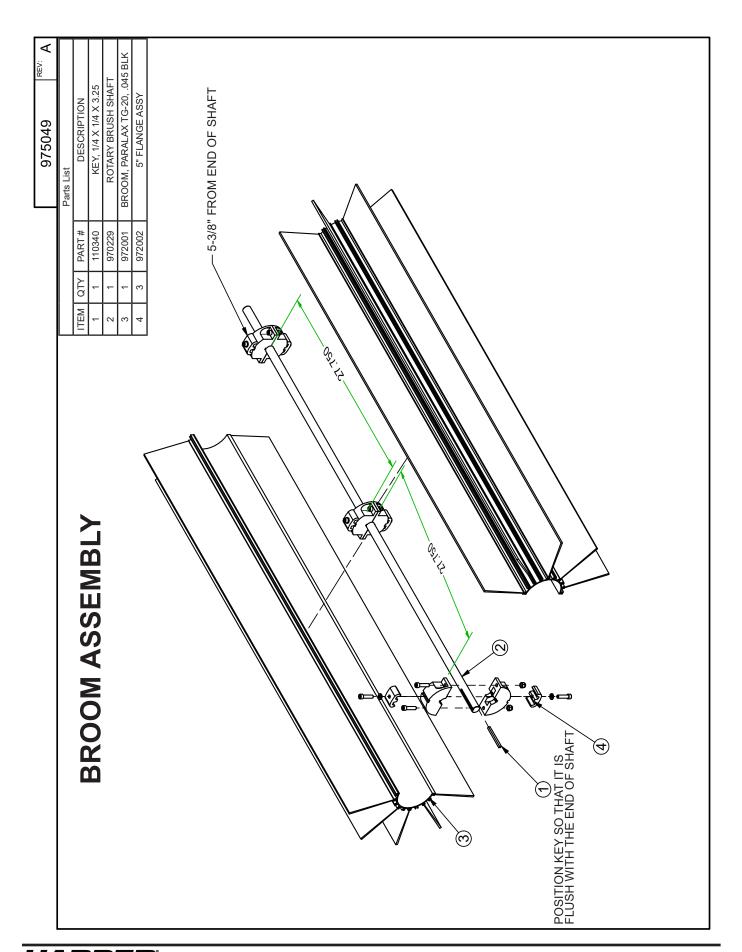

di caro	DESCRIPTION	ADAPTER, 6MJ-10MB	BEARING, SLAT DRIVE 1.25 SHAFT	MOTOR, EATON 101-1009	ASSEMBLY, TV60RE FINGER ROTOR	BEARING, 1" 2 BOLT FLANGE	BROOM MOTOR SPACER	GUARD - MOTOR, DECK, TV60	ARM - TORQUE, TV60	SUPPORT - TORQUE ARM	
	PART#	120144	410928	420127	914014	942080	970230	970828	970829	970830	
	QTY	7	-	-	-	1	1	1	-	-	
L	ITEM	19	20	21	22	23	24	22	56	27	
- of to 0	DESCRIPTION	NUT, 3/8-16 WIZ FLANGE	WASHER, 1/2" FLAT STANDARD	WASHER, 1/2" LOCK	WASHER, 7/16" FLAT STANDARD	WASHER, 7/16" LOCK	WASHER, 3/8" LOCK	WASHER, 3/8" FLAT STANDARD	Bolt, 3/8-16 X 0.75 in Carriage	COLLAR - 1-1/4" SPLIT	
	PART #	110645	110658	110666	110670	110671	110672	110676	110894	110956	
	QTY	9	2	2	2	2	4	2	9	2	
	ITEM	10	11	12	13	14	15	16	17	18	
+o: o#* 0	DESCRIPTION	Moulding, Edge	GROMMET, RUBBER .875 OD X .625 ID	BOLT, 1/2-13 X 1.5	BOLT, 3/8-16 X .75	BOLT, 3/8-16 X 1.5	BOLT, 7/16-14 X 1.5	NUT, 1/2-13	NUT, 3/8-16, UNITORQUE LOCK	NUT, 7/16-14	FINGER ROTOR KIT SOUZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZ
	PART#	100365	102005	110429	110433	110435	110535	110610	110621	110641	
	QTY	3"	-	2	4	1	2	2	1	2	
		-	1	Н	\vdash	-	-	\vdash	ш	Н	

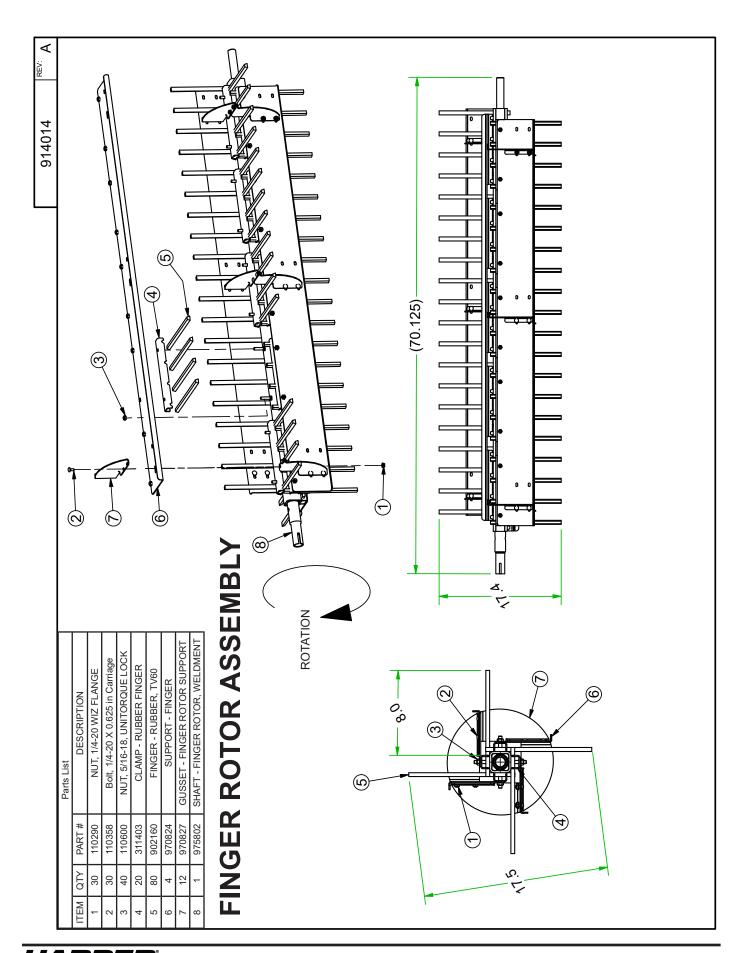

EDGE BRUSH HANGER WELDMENT

975136

975130

975128 975127

BRUSH ADAPTOR WELDMENT

LIFT LEVER WELDMENT

LIFT LATCH WELDMENT

SPACER, 1.700 X 1.005 X .320

WASHER, 1.50 X .320


970763

970764 975125

LIFT TUBE WELDMENT

FENCE BRUSH OPTION



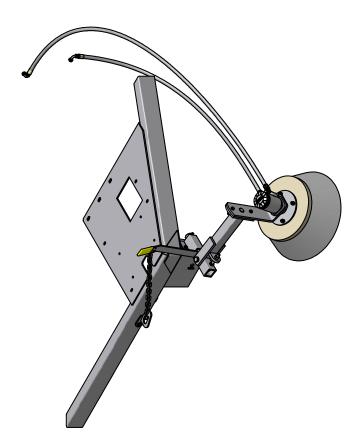

Hose, fence brush motor to broom motor

ARM, BRUSH MOTOR MOUNT

SHAFT, LIFT PIVOT

PUMP STOP CHAIN

Hose, valve to fence brush motor

COVER, VINYL.25 X 1.5 X 4 GRIP

910044 922004 922090 922091 970304 970748 970759

MOTOR, EATON 101-1009

BRUSH, 18" x 6" x 40 DEG

WASHER, 3/8" FLAT STANDARD

110676

120144 902112

110672

110667

WASHER, 3/8" LOCK WASHER, 1/4" LOCK

ADAPTER, 6MJ-10MB

NUT, 1/4-20 LOCK (NYLON INSERT) NUT, 3/8-16 LOCK NYLON INSERT

NUT, 5/16-18 LOCK (NYLON)

NUT, 1/2-13

110610 110612 110618 110630

NUT, 3/8-16 GR 2

BOLT, 1/2-13 X 2.5 TAP

110553 110603

BOLT, 1/4-20 X 1-1/2

WASHER, 1/4" FLAT SAE

110298 110378

BOLT, 3/8-16 X 3.0

DESCRIPTION

PART # 110015

ΩT


Parts List

BOLT, 5/16-18 X 2.0

BOLT, 5/8-11 X 4.0 BOLT, 3/8-16 X 2.0 BOLT, 3/8-16 X 1.0 BOLT, 3/8-16 X 1.25 BOLT, 3/8-16 X 1.5 BOLT, 1/4-20 X 1.0

110385 110400 110420 110425 110435 110464 110474 NUT, 5/8-11, UNITORQUE LOCK


110639

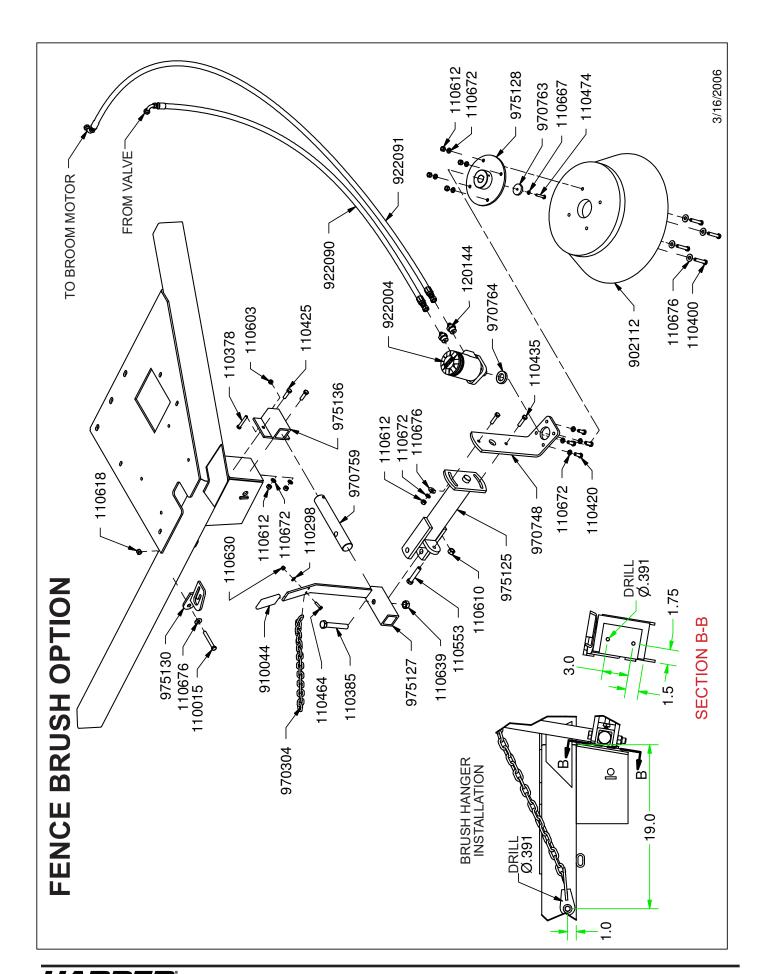



TV60RE EDGE BRUSH HYDRAULIC HOSES



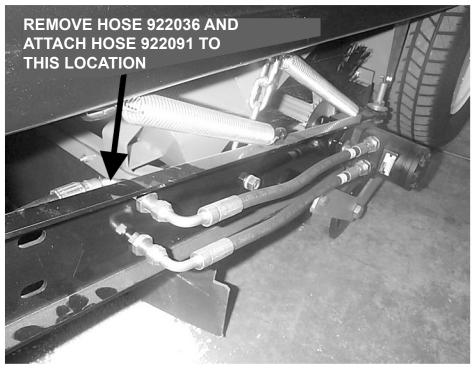

NOTES

 Harper Industries, Inc.
 Telephone:
 620-896-7381

 151 E. Highway 160
 Toll-Free:
 800-835-1042

 Harper, KS 67058
 Fax:
 620-896-7129

Website: www.harperindustries.com E-mail: info@harperindustries.com

